



THICK TURRET TOOLING



■ Ketec Precision Tooling Co., Ltd
Manufacturing CNC Punch Tooling



■ Ketec Precision Tooling Co., Ltd
Manufacturing Press Brake Tooling

KETEC CHINA SERVE THE WORLD

The biggest sheet metal tooling manufacturer in China

- National High Tech Enterprise
- Registered Capital: 50 Million RMB.
- Fix Assets: 150 Million RMB.
- Total factory area: 506,000 square feet (47,000 square meters).
- Annual Product Capacity: 1,200,000 sets for CNC punch press tooling; 20,000 sets for Press Brake Tooling.
- Over 300 high-quality employees in the company, KETEC have completed machining, EDM, heat treatment.
- National high-tech enterprise, features sheet metal technology R&D center.
- Obtains 18 national invention and new utility patent.
- Over 10,000 sheet metal enterprises in the world are using KETEC TOOLS
- 24 Direct sales in China and 18 KETEC Agents in the global countries.

1998 Sept. Founded Jiangnan Mold Tools Factory in Guangzhou.
Manufacturing stamping tooling.

2001 Aug. Established Ketec Precision Tooling Co.,Ltd.
Manufacturing CNC punch tooling and stamping tooling.

2004 Feb. Registered **KETEC®** trademark.

2004 Aug. ISO9000:2000 certified.

2004 Nov. Registered **KETEC®** as an international trademark.

2007 Dec. Registered enterprise value increasing to 5 Million RMB.

2008 Jan. Move to Mingzhu Industrial Park in Conghua Guangzhou with
approximately 323,000 square feet (30,000 square meters).

2008 Jan. Registered enterprise value increasing to 10 Million RMB.

2008 Mar. Awarded Guangdong Major Products certificate
for CNC punch tooling.

2008 Jun. Created guideline with permission from Standardization
Administration of People's Republic of China for CNC Turret
Punch Tooling standard.

2010 Feb. Published JB/T 10928–2010, CNC Turret Punch Tooling standard
by China Ministry of Industry and Information.
Implemented in July 2010.

2010 Nov. ISO 9001:2008 Certified.

2011 Jun. Started selling TOP series thick turret tooling.

2011 Nov. Setup warehouse in Taicang Jiangsu.

2012 Mar. Registered enterprise value increasing to 50 Million RMB.

2012 Jul. Rated as National High Tech Enterprise.
Certification No: GR201244000059

2012 Aug. Second location completed in Industrial Nan Road
Conghua Guangzhou with approximately 183000 square feet
(17000 square meters). Manufacturing press brake tooling.

2012 Aug. Established KETEC Precision Tooling Inc. in USA.

2013 Oct. Setup warehouse in Tianjin.

2015 Oct. Honored the Integrity of Law–Abiding business model in Guangzhou.

CONTENTS

***M85
M85 ABS
P1-P3***

***E80
P23-P24***

***SHAPE
CLASSES
P65-P66***

***TOP85
TOP85 ABS
P4-P9***

***SPECIAL
TOOLING
P25-P35***

***E85
P10-P15***

***FORMING
TOOLING
P36-P52***

***TOP90
TOP90 ABS
P16-P20***

***SHEET METAL
ACCESSORIES
P53-P60***

***KU TOOLING
(ULTRA)
P21-P22***

***OVERVIEW
P61-P64***



M85 **M85ABS**

- M85 / M85 ABS is quick adjust tooling, including A / B stations.
- Punch assy of A/B station is KETEC patent technology, punch grind life is 5mm [0.20"].
- M 85 equip with standard 85 punch, close guide; M85 ABS equip with 85 ABS punch, closed guide.
- Max. thickness: Mild steel A station 3.8 mm [0.15"], B stations: 6.3mm [0.25"].
- Punch assy of A/B station is KETEC patent technology, punch grind life is 5mm [0.20"], quick adjusting.
- Complete set tooling includes punch assy and die.
- Punch assy is installed in upper turret of the CNC punch machine.


M85 M85ABS

A STATION (1.6–12.7mm) [1/2"]

Solid Guide




Description	M85	M85 ABS
Punch Ass'y		
Round (0°)	HY.AA1RO.	HN.AA1RO.
Square(0°, 135°)	HY.AA3SQ.	HN.AA3SQ.
STD Shape (0°, 90°)	HY.AA2**.	HN.AA2**.
Other (0°, 90°)	HY.AA2**.	HN.AA2**.
Punch		
Round(no pin)	HT.AP1RO.	HK.AP1RO.
STD shape(pin)	HT.AP2**.	HK.AP2**.
Other(pin)	HT.AP2**.	HK.AP2**.
Die		
Round(no pin)	HT.AD1RO.	HT.AD1RO.
STD shape(pin)	HT.AD2**.	HT.AD2**.
Other(pin)	HT.AD2**.	HT.AD2**.
Guide		
Round (0°)	HT.AG1RO.	HN.AG1RO.
Shape (0°, 90°)	HT.AG2**.	HN.AG2**.
Square (0°, 135°)	HT.AG3SQ.	HN.AG3SQ.
Punch head ass'y	HY.AH9	HY.AH9

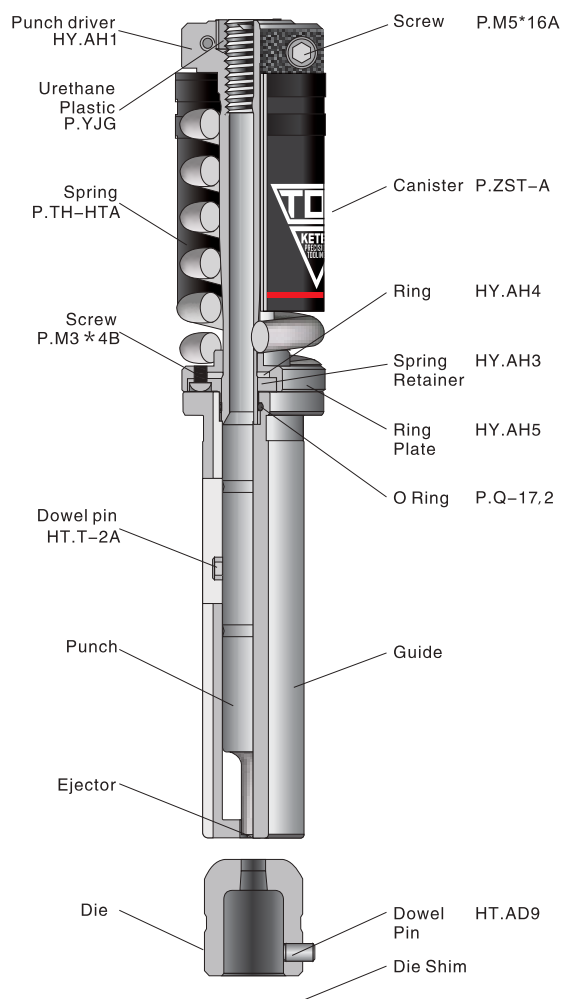



M85 M85ABS B STATION (12.71–31.7mm) [1–1/4"]

Solid Guide

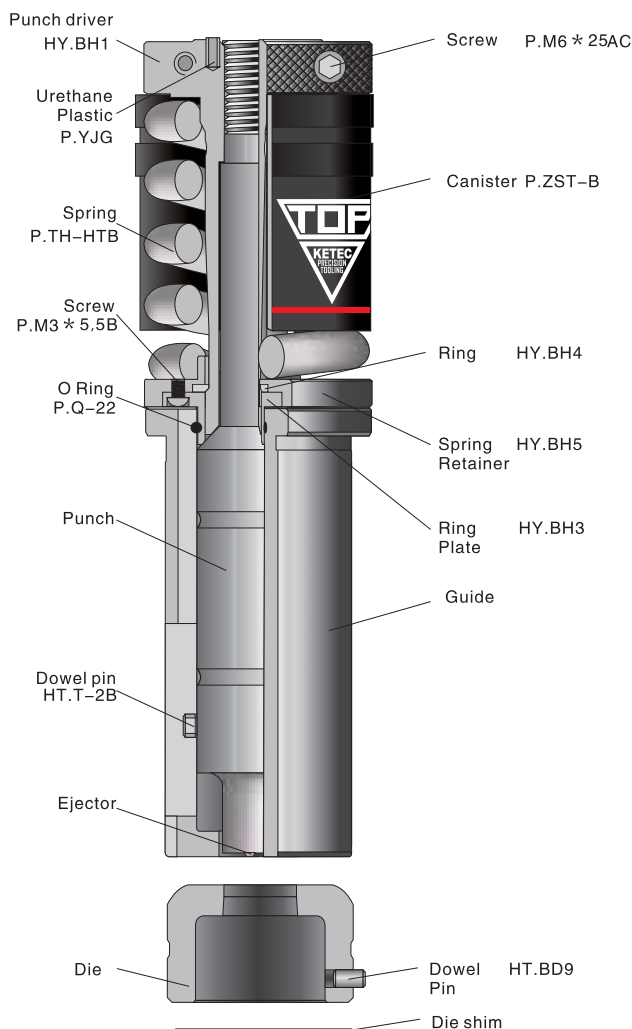

Discription	M85	M85 ABS
Punch Ass'y		
Round (0°)	HY.BA1RO.	HN.BA1RO.
Square(0°, 135°)	HY.BA3SQ.	HN.BA3SQ.
STD Shape (0°, 90°)	HY.BA2**.	HN.BA2**.
Other (0°, 90°)	HY.BA2**.	HN.BA2**.
Punch		
Round(no pin)	HT.BP1RO.	HK.BP1RO.
STD shape(pin)	HT.BP2**.	HK.BP2**.
Other(pin)	HT.BP2**.	HK.BP2**.
Die		
Round(no pin)	HT.BD1RO.	HT.BD1RO.
STD shape(pin)	HT.BD2**.	HT.BD2**.
Other(pin)	HT.BD2**.	HT.BD2**.
Guide		
Round (0°)	HT.BG1RO.	HN.BG1RO.
Shape (0°, 90°)	HT.BG2**.	HN.BG2**.
Square (0°, 135°)	HT.BG3SQ.	HN.BG3SQ.
Punch head ass'y	HY.BH9	HY.BH9



TOP85 **TOP85ABS**


- TOP85 series are Q-Adjust tooling, including A / B / C / D / E stations.
- Guide assy of C/D/E station is KETEC patent technology, with standard 85 punch / ABS punch & stripper.
- Standard key slots on the guides of C/D/E station are divided into 0° , 90° , 135° , good performance.
- Punch grind life of C/D/E station is 5–8mm [0.20"~0.31"], quick adjusting, without shim.
- Punch assy of A/B station is KETEC patent technology, punch grind life is 5mm [0.20"], quick adjusting.
- Top 85 equip with standard 85 punch, open guide, 90 stripper.
- Top 85 ABS equip with 85 ABS punch, open guide, 90 ABS stripper.
- Max. thickness: Mild steel A station 3.8 mm [0.15"], other stations: 6.3mm [0.25"]
- Complete set tooling includes punch assy and die.
- Punch assy is installed in upper turret of the CNC punch machine.



TOP85 TOP85ABS

A STATION
(1.6–12.7mm)
[1/2"]

Open Guide

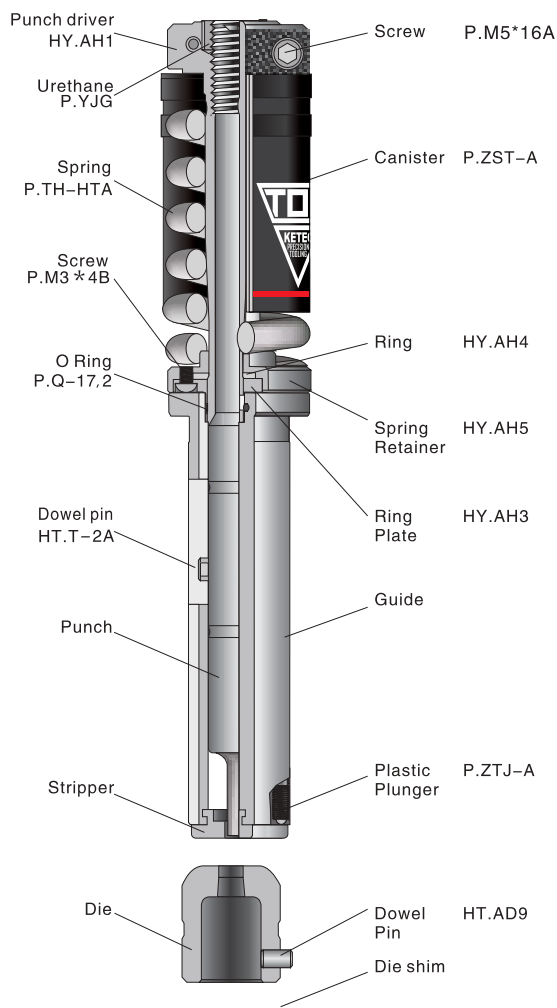

Discription	TOP85	TOP85 ABS
-------------	-------	-----------

Punch ass'y

Round (0°)	HV.AA1RO.	HK.AA1RO.
Square (0°, 135°)	HV.AA3SQ.	HK.AA3SQ.
STD shape (0°, 90°)	HV.AA2**.	HK.AA2**.
Other (0°, 90°)	HV.AA2**.	HK.AA2**.

Punch

Round (no pin)	HT.AP1RO.	HK.AP1RO.
STD shape (pin)	HT.AP2**.	HK.AP2**.
Other (pin)	HT.AP2**.	HK.AP2**.

Stripper

Round	H9.AS1RO.	HP.AS1RO.
STD shape	H9.AS1**.	HP.AS1**.
Other	H9.AS1**.	HP.AS1**.

Die

Round (no pin)	HT.AD1RO.	HT.AD1RO.
STD shape (pin)	HT.AD2**.	HT.AD2**.
Other (pin)	HT.AD2**.	HT.AD2**.

Guide

Round (0°)	HV.AG1	HK.AG1
Shape (0°, 90°)	HV.AG2	HK.AG2
Square (0°, 135°)	HV.AG3	HK.AG3

Punch head ass'y	HY.AH9	HY.AH9
------------------	--------	--------


TOP85 TOP85ABS

B STATION
(12.71–31.7mm)
[1-1/4"]

Open Guide




Discription	TOP85	TOP85 ABS
Punch ass'y		
Round (0°)	HV.BA1RO.	HK.BA1RO.
Square (0°, 135°)	HV.BA3SQ.	HK.BA3SQ.
STD shape(0°, 90°)	HV.BA2**.	HK.BA2**.
Other (0°, 90°)	HV.BA2**.	HK.BA2**.
Punch		
Round(no pin)	HT.BP1RO.	HK.BP1RO.
STD shape(pin)	HT.BP2**.	HK.BP2**.
Other(pin)	HT.BP2**.	HK.BP2**.
Stripper		
Round	H9.BS1RO.	HP.BS1RO.
STD shape	H9.BS1**.	HP.BS1**.
Other	H9.BS1**.	HP.BS1**.
Die		
Round(no pin)	HT.BD1RO.	HT.BD1RO.
STD shape(pin)	HT.BD2**.	HT.BD2**.
Other (pin)	HT.BD2**.	HT.BD2**.
Guide		
Round (0°)	HV.BG1	HK.BG1
Shape (0°, 90°)	HV.BG2	HK.BG2
Square(0°, 135°)	HV.BG3	HK.BG3
Punch head ass'y	HY.BH9	HY.BH9

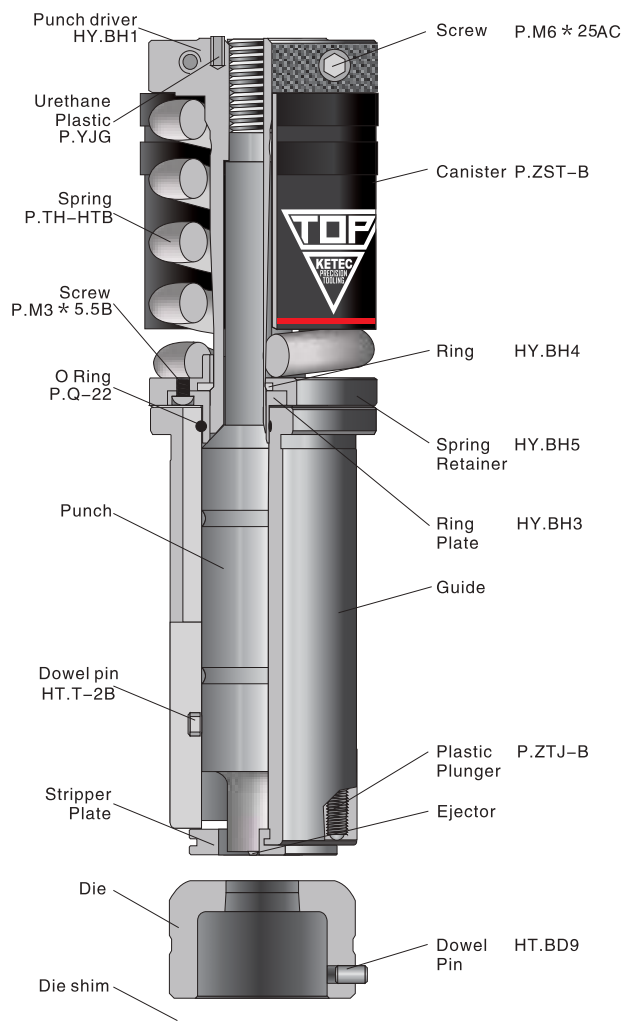



TOP85 TOP85ABS C STATION (31.71-50.8mm) [2"]

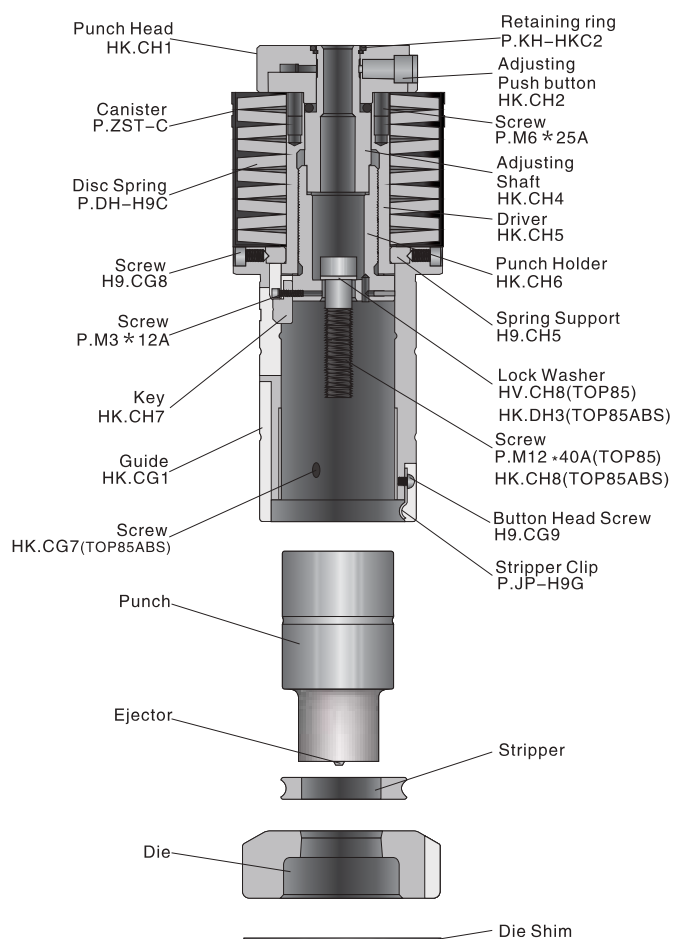

Description

Punch ass'y

Round
 STD shape
 Other

Guide ass'y

Punch

Round
 STD shape
 Other

Stripper

Round
 STD shape
 Other

Die

Round (0°)
 STD shape (0°, 90°)
 Other (0°, 90°)
 Square (Opt. 0°, 135°)

TOP85

HV.CA1RO.
 HV.CA1**.
 HV.CA1**.
 HV.CC1.

TOP85 ABS

HK.CA1RO.
 HK.CA1**.
 HK.CA1**.
 HK.CC1.


HT.CP1RO.
 HT.CP2**.
 HT.CP2**.
 HT.CS1RO.
 HT.CS1**.
 HT.CS1**.
 HT.CD1RO.
 HT.CD2**.
 HT.CD2**.
 HT.CD2**.
 HT.CD3SQ.
 HT.CD3SQ.

HK.CP1RO.
 HK.CP2**.
 HK.CP2**.
 HK.CS1RO.
 HK.CS1**.
 HK.CS1**.
 HK.CD1RO.
 HK.CD2**.
 HK.CD2**.
 HK.CD2**.
 HK.CD3SQ.
 HK.CD3SQ.

TOP85 TOP85ABS D STATION (50.81–88.9mm) [3-1/2"]






Description	TOP85	TOP85 ABS
Punch ass'y		
Round	HV.DA1RO.	HK.DA1RO.
STD shape	HV.DA1**.	HK.DA1**.
Other	HV.DA1**.	HK.DA1**.
Guide ass'y	HV.DC1.	HK.DC1.
Punch		
Round	HT.DP1RO.	HK.DP1RO.
STD shape	HT.DP2**.	HK.DP2**.
Other	HT.DP2**.	HK.DP2**.
Stripper		
Round	HT.DS1RO.	HK.DS1RO.
STD shape	HT.DS1**.	HK.DS1**.
Other	HT.DS1**.	HK.DS1**.
Die		
Round (0°)	HT.DD1RO.	HT.DD1RO.
STD shape (0°,90°)	HT.DD2**.	HT.DD2**.
Other (0°,90°)	HT.DD2**.	HT.DD2**.
Square (Opt.0°,135°)	HT.DD3SQ.	HT.DD3SQ.

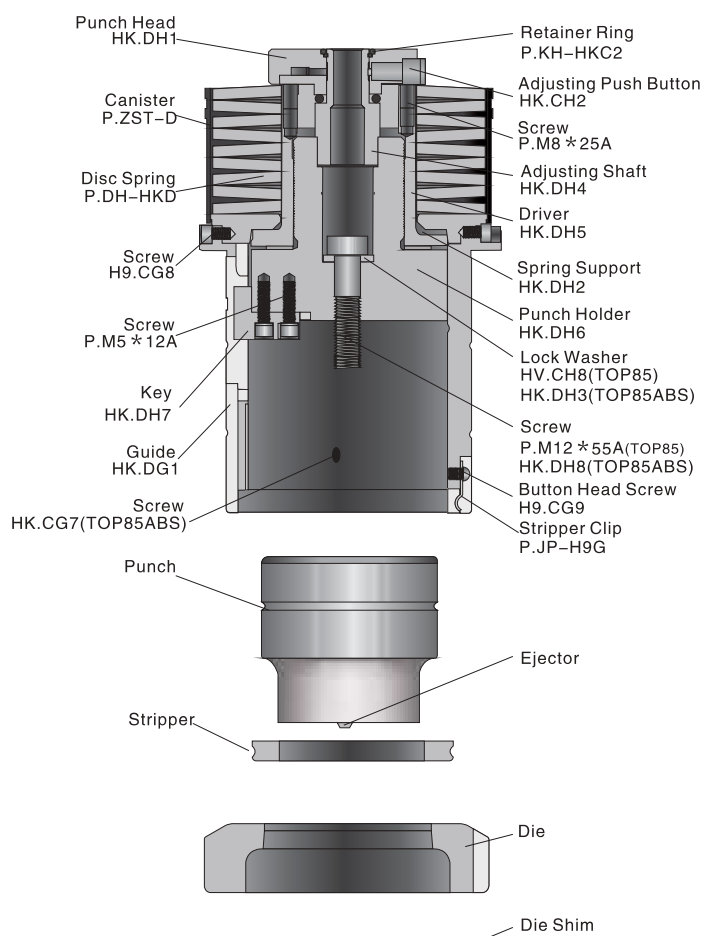



TOP85 TOP85ABS E STATION (88.91–114.3mm) [4-1/2"]

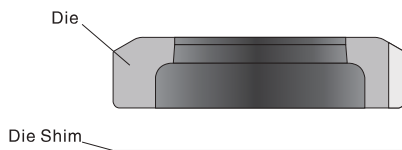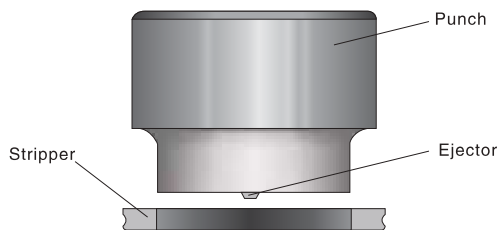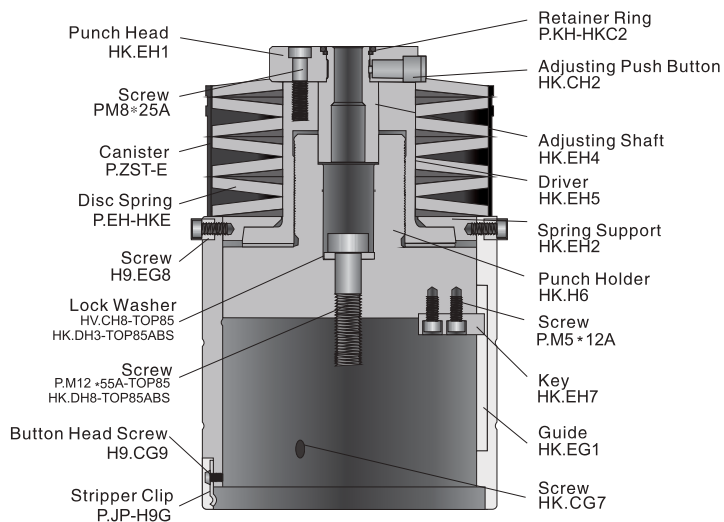

Description	TOP85	TOP85 ABS
Punch ass'y		
Round	HV.EA1RO.	HK.EA1RO.
STD shape	HV.EA1**.	HK.EA1**.
Other	HV.EA1**.	HK.EA1**.
Guide ass'y	HV.EC1.	HK.EC1.
Punch		
Round	HT.EP1RO.	HK.EP1RO.
STD shape	HT.EP2**.	HK.EP2**.
Other	HT.EP2**.	HK.EP2**.
Stripper		
Round	HT.ES1RO.	HK.ES1RO.
STD shape	HT.ES1**.	HK.ES1**.
Other	HT.ES1**.	HK.ES1**.
Die		
Round (0°)	HT.ED1RO.	HT.ED1RO.
STD shape (0°,90°)	HT.ED2**.	HT.ED2**.
Other (0°,90°)	HT.ED2**.	HT.ED2**.
Square (Opt. 0°,135°)	HT.ED3SQ.	HT.ED3SQ.




■ E85

- E85 series are standard tools, including station A/B/C/D/E, compatible with Amada tooling.
- Standard key slots on the guides of A/B station are 0° , 90° , square are 0° , 135° .
- The tapers on spring retainers of A/B station are different, the grind life will be extended with exchange using.
- Max. thickness: Mild Steel for A station is 3.8mm [0.15"], other station is 6.3mm [0.25"].
- Complete set tooling includes punch assy and die.
- Punch assy is installed in upper turret of the CNC punch machine.



E85

A STATION (1.6~12.7mm) [1/2"]

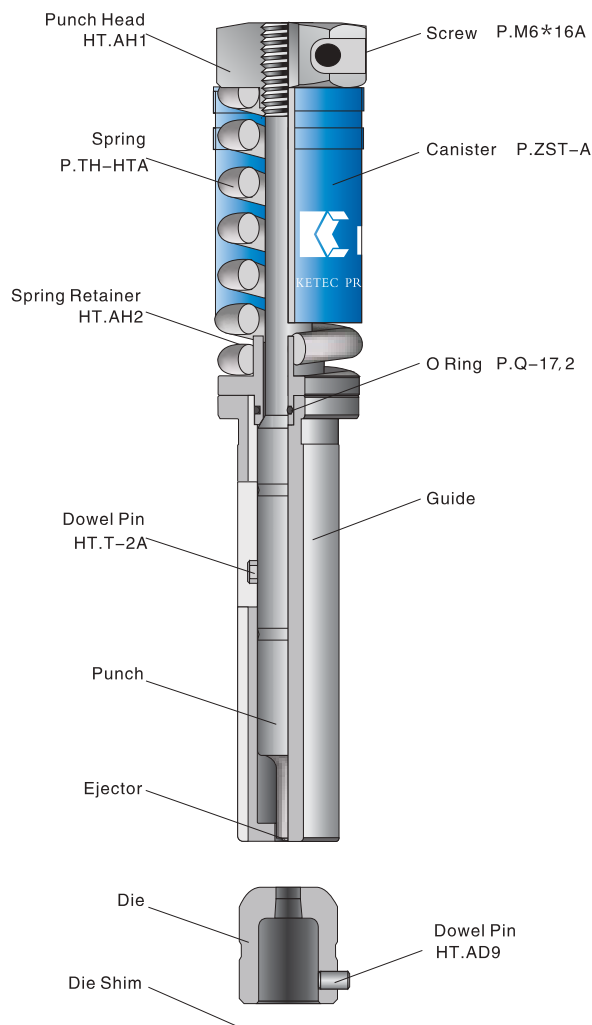

Description

Code

Punch ass'y

Round (0°)	HT.AA1RO.
Square (0°, 135°)	HT.AA3SQ.
STD shape (0°, 90°)	HT.AA2**.
Other (0°, 90°)	HT.AA2**.

Punch

Round (no pin)	HT.AP1RO.
STD shape (pin)	HT.AP2**.
Other (pin)	HT.AP2**.

Die

Round (no pin)	HT.AD1RO.
STD shape (pin)	HT.AD2**.
Other (pin)	HT.AD2**.

Guide

Round (0°)	HT.AG1RO.
Shape (0°, 90°)	HT.AG2**.
Square (0°, 135°)	HT.AG3SQ.

Punch head ass'y

HT.AH9

E85

B STATION (12.71–31.7mm) [1–1/4"]



Description

Punch ass'y

Round (0°)
Square (0°, 135°)
STD shape (0°, 90°)
Other (0°, 90°)

Code

HT.BA1RO.
HT.BA3SQ.
HT.BA2**.
HT.BA2**.

Punch

Round (no pin)
STD shape (pin)
Other (pin)

HT.BP1RO.
HT.BP2**.
HT.BP2**.

Die

Round (no pin)
STD shape (pin)
Other (pin)

HT.BD1RO.
HT.BD2**.
HT.BD2**.


Guide

Round (0°)
Shape (0°, 90°)
Square (0°, 135°)

HT.BG1RO.
HT.BG2**.
HT.BG3SQ.

Punch head ass'y


HT.BH9

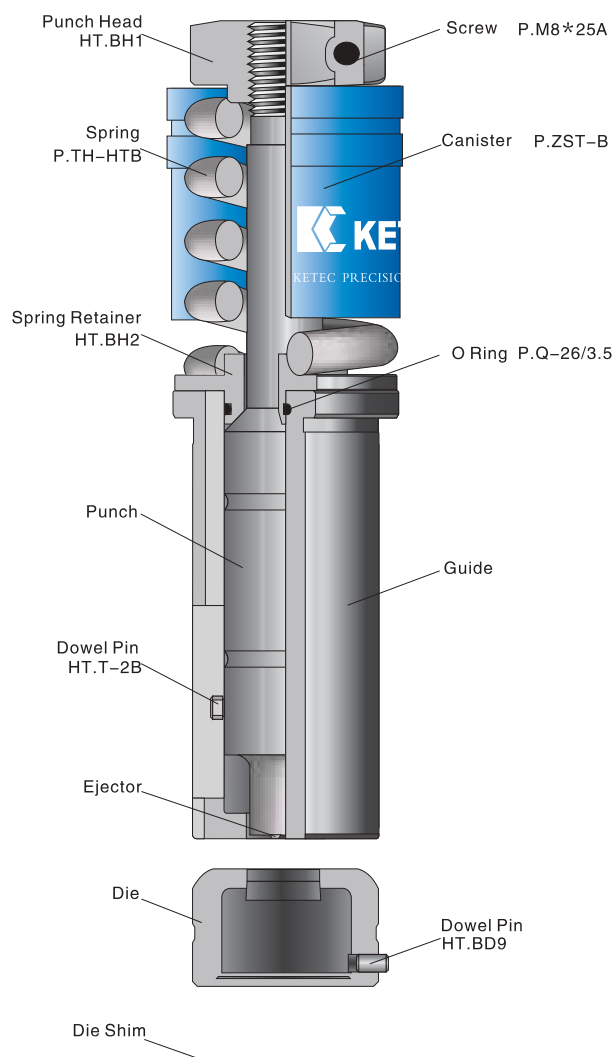



E85

C STATION (31.71–50.8mm) [2"]

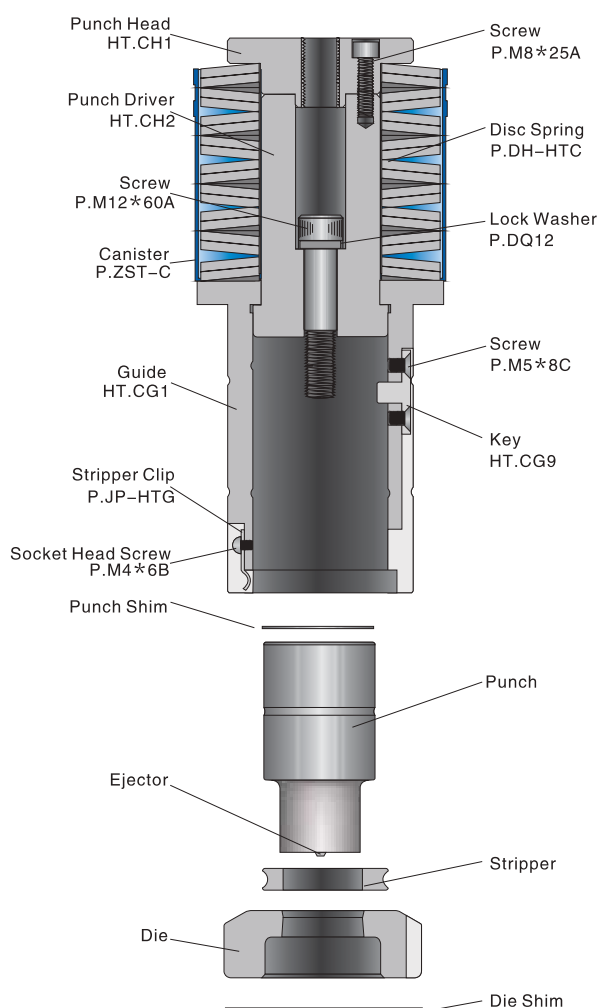

Description	Code
Punch ass'y	
Round	HT.CA1RO.
STD shape	HT.CA1**.
Other	HT.CA1**.
Guide ass'y (0°,90°)	HT.CC1.
Punch	
Round	HT.CP1RO.
STD shape	HT.CP2**.
Other	HT.CP2**.
Square (Opt.0°,135°)	HT.CP3SQ.
Stripper	
Round	HT.CS1RO.
STD shape	HT.CS1**.
Other	HT.CS1**.
Die	
Round(0°)	HT.CD1RO.
STD shape (0°,90°)	HT.CD2**.
Other (0°,90°)	HT.CD2**.
Square (Opt. 0°,135°)	HT.CD3SQ.

E85

D STATION (50.81–88.9mm) [3–1/2"]



Description

Punch ass'y

Round

STD Shape

Other

Guide ass'y

Punch

Round (0°)

STD shape (0°)

Other (0°)

Square (Opt.0°,45°)

Stripper

Round

STD shape

Other

Die

Round (0°)

STD shape (0°,90°)

Other (0°,90°)

Square(Opt.0°,135°)

Code

HT.DA1RO.

HT.DA1**.

HT.DA1**.

HT.DC1.

HT.DP1RO.

HT.DP2**.

HT.DP2**.

HT.DP3SQ.

HT.DS1RO.

HT.DS1**.


HT.DS1**.

HT.DD1RO.

HT.DD2**.

HT.DD2**.


HT.DD3SQ.

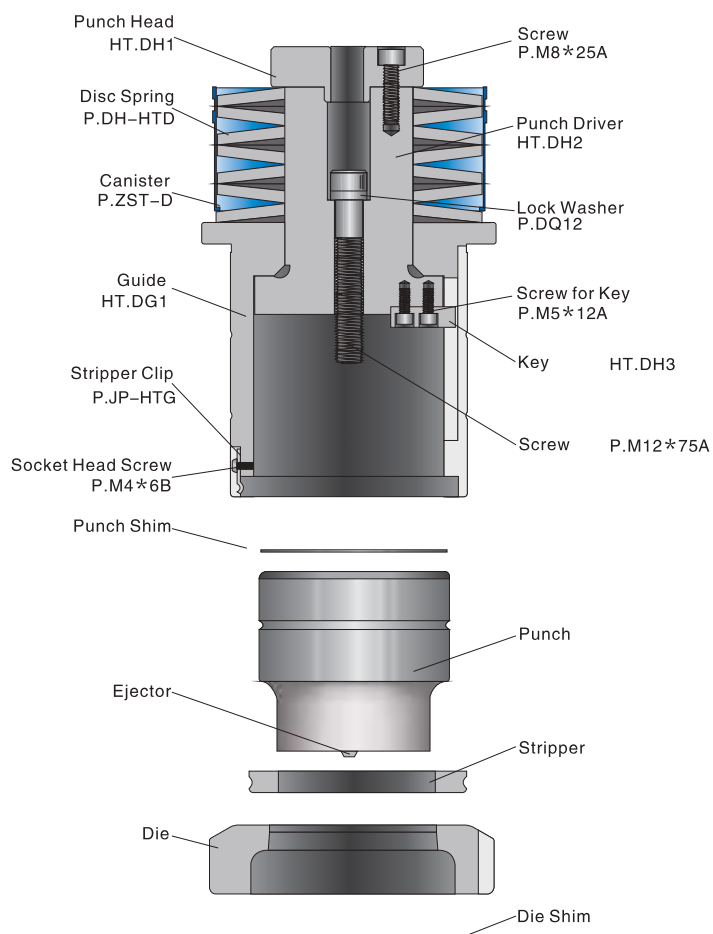



E85

E STATION (88.91–114.3mm) [4-1/2"]

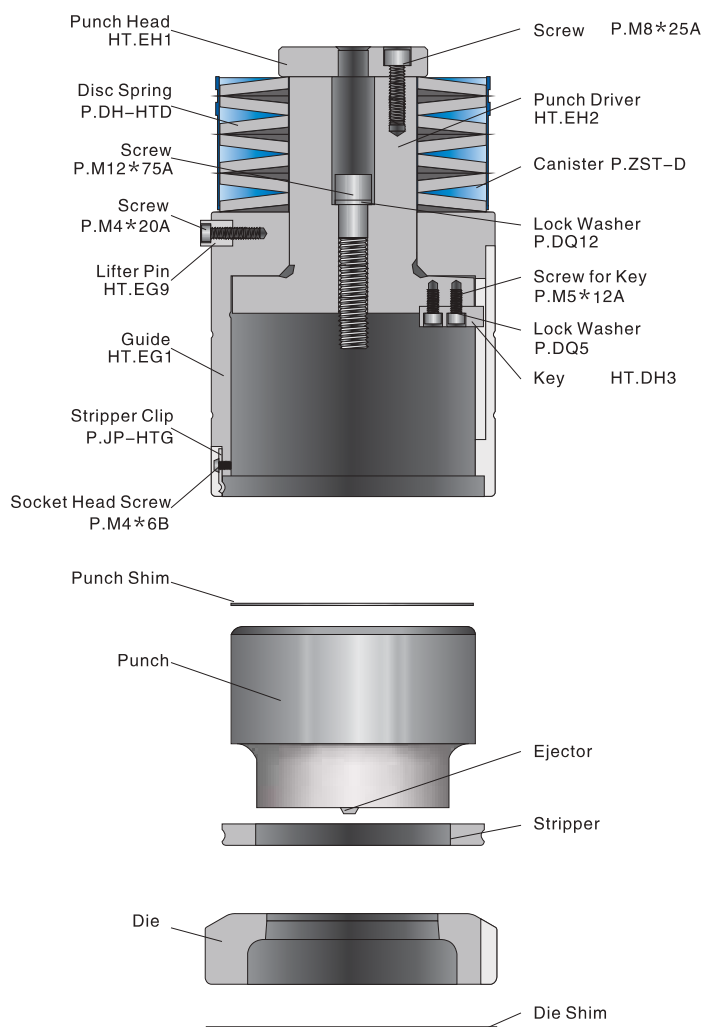

Discription	Code
Punch ass'y	
Round	HT.EA1RO.
STD shape	HT.EA1**.
Other	HT.EA1**.
Guide ass'y(0°,90°)	HT.EC1.
Punch	
Round (0°)	HT.EP1RO.
STD shape (0°)	HT.EP2**.
Other (0°)	HT.EP2**.
Stripper	
Round	HT.ES1RO.
STD shape	HT.ES1**.
Other	HT.ES1**.
Die	
Round (0°)	HT.ED1RO.
STD shape (0°,90°)	HT.ED2**.
Other (0°,90°)	HT.ED2**.




■ **TOP90** ■ **TOP90ABS**

- TOP90 series tooling, including station A/B/C/D.
- Guide assy of C/D station is KETEC patent technology, with standard 90 punch, 90 stripper.
- Punch head assy of A/B station is KETEC patent technology, with standard 90 punch / ABS punch / stripper.
- The punch grind life of A/B station is 6.3mm [0.25"] quick adjusting, w/o shim.
- The punch grind life of C/D station is 5–8mm [0.20"~0.31"], quick adjusting, w/o shim.
- Standard key slots on the guides of C/D station with 0°, 90°, 135°, good performance.
- Max thickness: Mild Steel for A station is 3.8mm [0.15"], for others stations is 6.3mm [0.25"]
- Complete set tooling includes punch assy and die.
- Punch assy is installed in upper turret of the CNC punch machine.



TOP90 TOP90ABS A STATION (1.6–12.7mm) [1/2"]

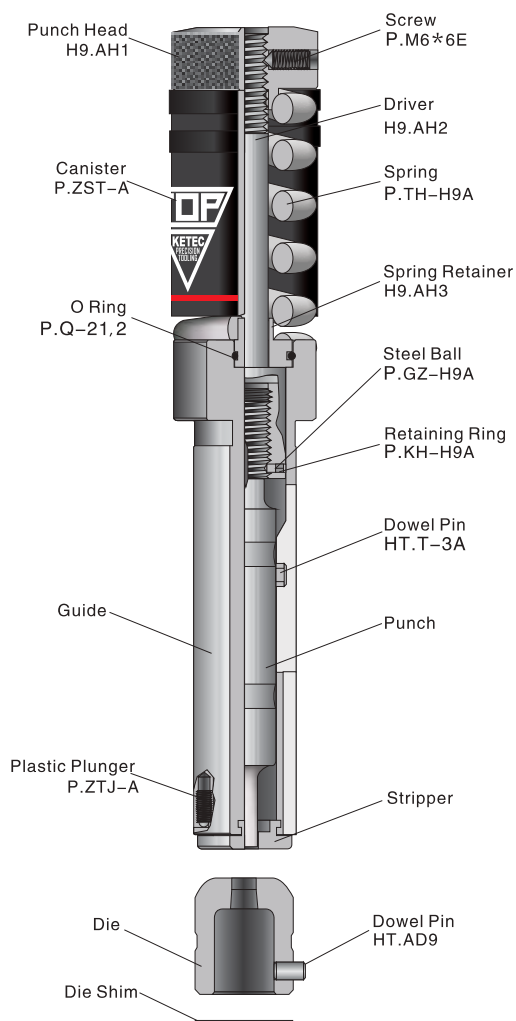


Description	TOP90	TOP90 ABS
Punch ass'y		
Round (0°)	H9.AA1RO.	HP.AA1RO.
Square (0°, 135°)	H9.AA3SQ.	HP.AA3SQ.
STD shape (0°, 90°)	H9.AA2**.	HP.AA2**.
Other (0°, 90°)	H9.AA2**.	HP.AA2**.
Punch		
Round (no pin)	H9.AP1RO.	HP.AP1RO.
STD shape (pin)	H9.AP2**.	HP.AP2**.
Other (pin)	H9.AP2**.	HP.AP2**.
Stripper		
Round	H9.AS1RO.	HP.AS1RO.
STD shape	H9.AS1**.	HP.AS1**.
Other	H9.AS1**.	HP.AS1**.
Die		
Round(no pin)	HT.AD1RO.	HT.AD1RO.
STD shape (pin)	HT.AD2**.	HT.AD2**.
Other (pin)	HT.AD2**.	HT.AD2**.
Guide		
Round (0°)	H9.AG1	HP.AG1
Shape (0°, 90°)	H9.AG2	HP.AG2
Square (0°, 135°)	H9.AG3	HP.AG3
Punch head ass'y	H9.AH9	H9.AH9


TOP90 TOP90ABS B STATION (12.71–31.7mm) [1–1/4"]



Description	TOP90	TOP90 ABS
Punch ass'y		
Round (0°)	H9.BA1RO.	HP.BA1RO.
Square (0°, 135°)	H9.BA3SQ.	HP.BA3SQ.
STD shape (0°, 90°)	H9.BA2**.	HP.BA2**.
Other (0°, 90°)	H9.BA2**.	HP.BA2**.
Punch		
Round (no pin)	H9.BP1RO.	HP.BP1RO.
STD shape (pin)	H9.BP2**.	HP.BP2**.
Other (pin)	H9.BP2**.	HP.BP2**.
Stripper		
Round	H9.BS1RO.	HP.BS1RO.
STD shape	H9.BS1**.	HP.BS1**.
Other	H9.BS1**.	HP.BS1**.
Die		
Round (no pin)	HT.BD1RO.	HT.BD1RO.
STD shape (pin)	HT.BD2**.	HT.BD2**.
Other (pin)	HT.BD2**.	HT.BD2**.
Guide		
Round (0°)	H9.BG1	HP.BG1
Shape (0°, 90°)	H9.BG2	HP.BG2
Square (0°, 135°)	H9.BG3	HP.BG3
Punch head ass'y	H9.BH9	H9.BH9

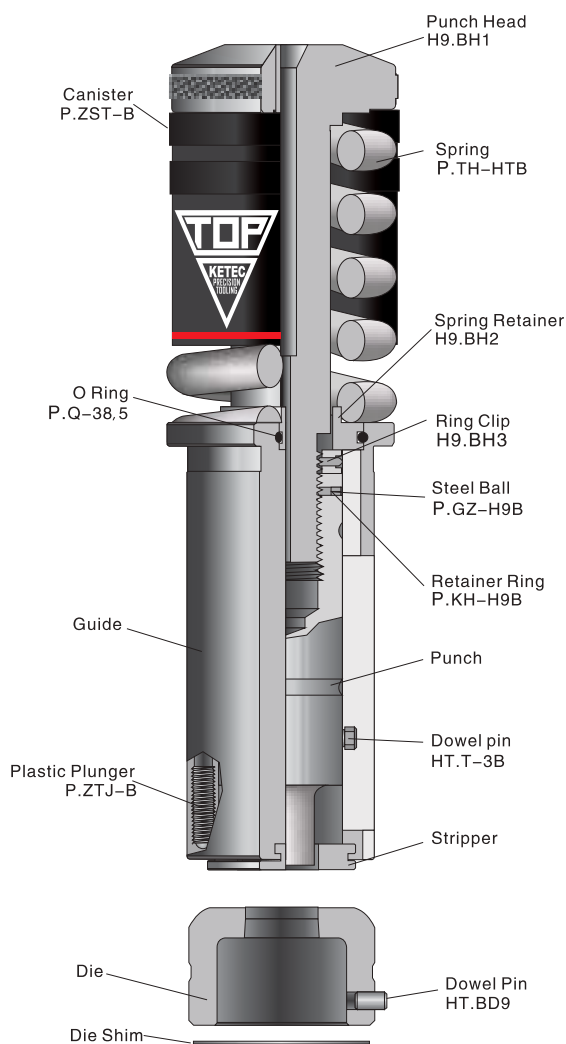

TOP90 TOP90ABS C STATION (31.71–50.8mm) [2"]

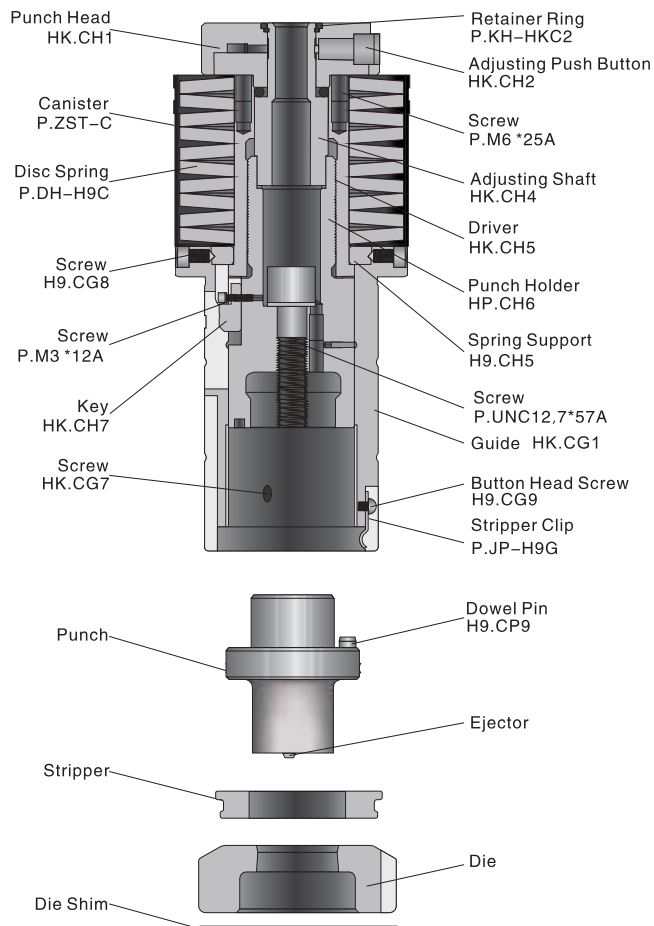

Description

Punch ass'y

Round

STD shape

Other

Guide ass'y (0°, 90°, 135°)

Punch

Round

STD shape

Other

Stripper

Round

STD shape

Other

Die

Round (0°)

STD Shape (0°, 90°)

Other (0°, 90°)

Square (Opt. 0°, 135°)

TOP90

HJ.CA1RO.

HJ.CA1**.

HJ.CA1**.

HP.CC1.

H9.CP1RO.

H9.CP1**.

H9.CP1**.

H9.CS1RO.

H9.CS1**.

H9.CS1**.

HT.CD1RO.

HT.CD2**.

HT.CD2**.

HT.CD3SQ.

TOP90 ABS

HP.CA1RO.

HP.CA1**.

HP.CA1**.

HP.CC1.

H9.CP1RO.

H9.CP1**.

H9.CP1**.

HP.CS1RO.

HP.CS1**.

HP.CS1**.

HT.CD1RO.

HT.CD2**.

HT.CD2**.

HT.CD3SQ.

TOP90 TOP90ABS

D STATION

(50.81–88.9mm)
[3-1/2"]



Description

Punch ass'y

Round
STD shape
Other

Guide ass'y

Punch

Round
STD shape
Other

Stripper

Round
STD shape
Other

Die

Round (0°)
STD Shape (0°, 90°)
Other (0°, 90°)
Square (Opt. 0°, 135°)

TOP90

HJ.DA1RO.
HJ.DA1**.
HJ.DA1**.

HP.DC1.

H9.DP1RO.
H9.DP1**.
H9.DP1**.

H9.DS1RO.
H9.DS1**.
H9.DS1**.

HT.DD1RO.
HT.DD2**.
HT.DD2**.
HT.DD3SQ.

TOP90 ABS


HP.DA1RO.
HP.DA1**.
HP.DA1**.

HP.DC1.

H9.DP1RO.
H9.DP1**.
H9.DP1**.

HP.DS1RO.
HP.DS1**.
HP.DS1**.

HT.DD1RO.
HT.DD2**.
HT.DD2**.
HT.DD3SQ.

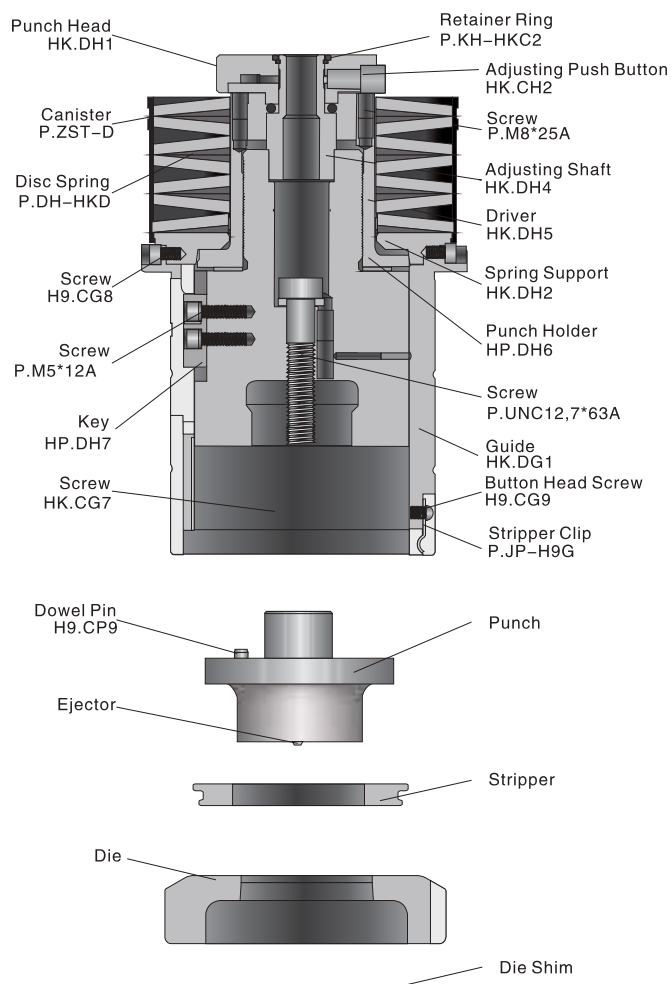




KU TOOLING A STATION

(1.6–12.7mm)
[1/2"]

Ultra Style

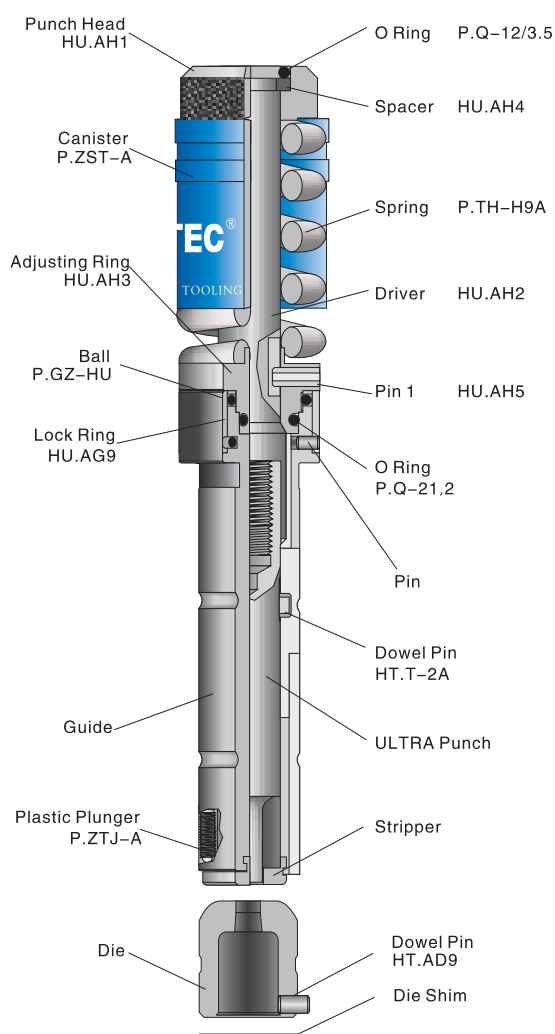

Description	Code
Punch ass'y	
Round (0°)	HU.AA1RO
Square (0°, 135°)	HU.AA3SQ
STD shape (0°, 90°)	HU.AA2**
Other (0°, 90°)	HU.AA2**
Punch	
Round	HU.AP1RO
STD shape	HU.AP1**.
Other	HU.AP1**.
Stripper	
Round	HU.AS1RO
STD shape	HU.AS1**.
Other	HU.AS1**.
Die	
Round (no pin)	HT.AD1RO
STD shape (pin)	HT.AD2**.
Other (pin)	HT.AD2**.
Guide	
Round (0°)	HU.AG1
Shape (0°, 90°)	HU.AG2
Square (0°, 135°)	HU.AG3
Punch head ass'y	HU.AH9

KU TOOLING B STATION (12.71–31.7mm) [1–1/4"]

Ultra Style



Description Code

Punch ass'y

Round (0°)	HU.BA1RO
Square (0°, 135°)	HU.BA3SQ
STD shape (0°, 90°)	HU.BA2**
Other (0°, 90°)	HU.BA2**

Punch

Round	HU.BP1RO
STD shape	HU.BP1**.
Other	HU.BP1**.

Stripper

Round	HU.BS1RO
Shape	HU.BS1**.
Other	HU.BS1**.


Die

Round (no pin)	HT.BD1RO
STD shape (pin)	HT.BD2**.
Other (pin)	HT.BD2**.

Guide


Round (0°)	HU.BG1
Shape (0°, 90°)	HU.BG2
Square (0°, 135°)	HU.BG3

Punch head ass'y HU.BH9

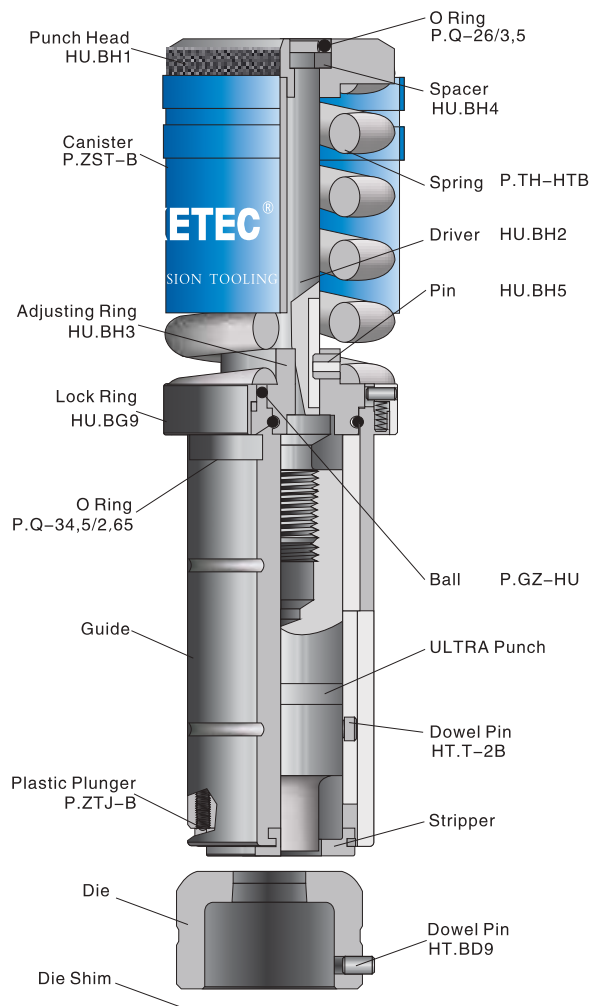

E80

A STATION (1.6–12.7mm) [1/2"]

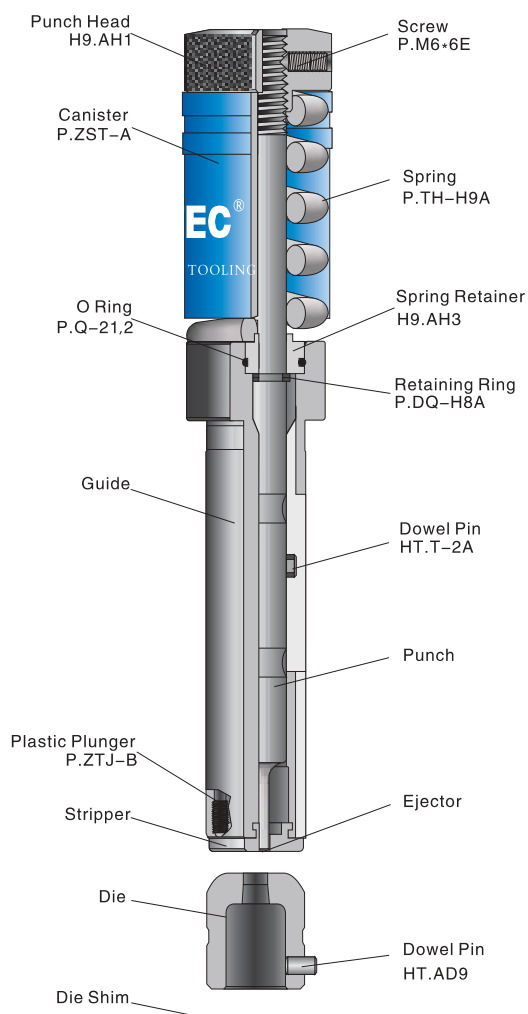


Description	Code
Punch ass'y	
Round (0°)	H8.AA1RO.
Square (0°, 135°)	H8.AA3SQ.
STD shape (0°, 90°)	H8.AA2**.
Other (0°, 90°)	H8.AA2**.
Punch	
Round (no pin)	H8.AP1RO.
STD shape (pin)	H8.AP2**.
Other (pin)	H8.AP2**.
Stripper	
Round	H9.AS1RO.
STD shape	H9.AS1**.
Other	H9.AS1**.
Die	
Round (no pin)	HT.AD1RO.
STD shape (pin)	HT.AD2**.
Other (pin)	HT.AD2**.
Guide (Opt. solid)	
Round (0°)	H8.AG1RO.
Shape (0°, 90°)	H8.AG2**.
Square (0°, 135°)	H8.AG3SQ.
Guide (STD. open)	
Round (0°)	H9.AG1
Shape (0°, 90°)	H9.AG2
Square (0°, 135°)	H9.AG3

E80

B STATION (12.71–31.7mm) [1–1/4"]



Description	Code
Punch ass'y	
Round (0°)	H8.BA1RO.
Square (0°, 135°)	H8.BA3SQ.
STD shape (0°, 90°)	H8.BA2**.
Other (0°, 90°)	H8.BA2**.
Punch	
Round (no pin)	H8.BP1RO.
STD shape (pin)	H8.BP2**.
Other (pin)	H8.BP2**.
Stripper	
Round	H8.BS1RO.
STD shape	H8.BS1**.
Other	H8.BS1**.
Die	
Round (no pin)	HT.BD1RO.
STD shape (pin)	HT.BD2**.
Other (pin)	HT.BD2**.
Guide	
Round (0°)	H8.BG1
Shape (0°, 90°)	H8.BG2
Square (0°, 135°)	H8.BG3

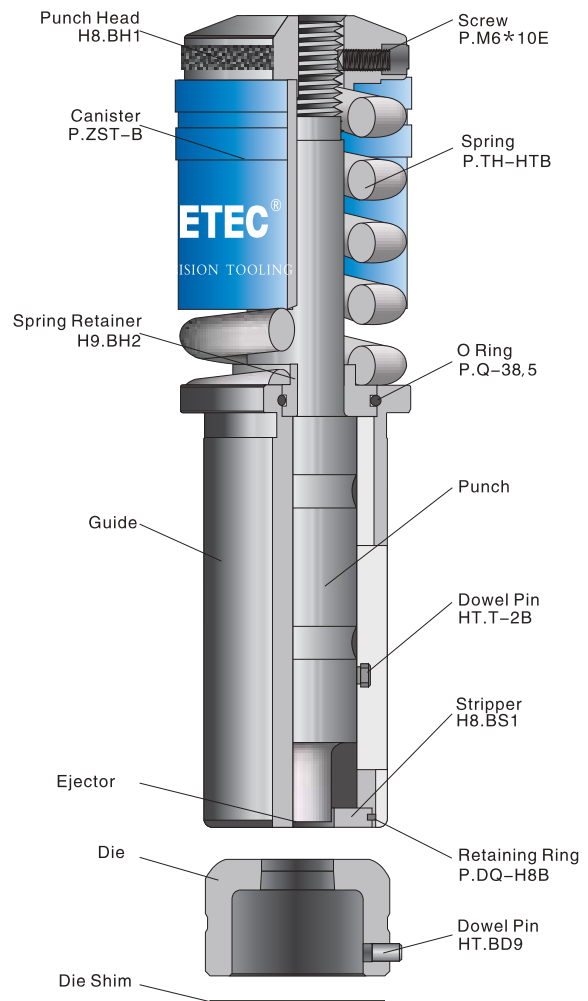



Contouring



SPH Heavy Duty




E-Break Tool
E-Bend Tool



SPS
Fully Guide Small Diameter



SPL



Multi-Tool



Cluster



Slitting Tool



Close To Clamp

■ SPECIAL TOOLING

CONTOURING A STATION

Specification / Size:

Punch size:

Ø2mm[0.079"], Ø2.5mm[0.098"]


Die clearance:

+0.2mm [0.008"]

+0.25mm [0.010"]




Standard



STD : 0.15MM
[0.006"]




SPS




SPS: 0.025MM
[0.0010"]



CONTOURING



Contouring: 0.01MM
[0.0004"]



Contouring tool size:
RO 2 + 0.2 mm [0.08"+0.008"]
punch 1 mm [0.04"], SPCC precisely
in 0.5mm [0.02"] step.

Die

- Special die structure, prevent slug pulling
- Die is a Press-Fit insert structure
- Hard alloy material, hardness: HRC75, longer tool life.

Punch


- ABS structure cools down the lubricating of slide and punch blade portion.
- Smaller size punch with changeable insert is more affordable.
- Hard alloy material, hardness: HRC75, longer tool life.
- Guide surface with hardening treatment increases wear resistance.
- Can achieve 0.5mm [0.02"] step in precisely nibbling
- Both punch and die are hard alloy material, hardness is HRC75.
- Get a fine contour with standard tools, elimination of secondary operations.
- Prevent punch breakage when disalignment
- With ABS function, reduce material adhesion to punch surface increased wear resistance, longer tool life.

Description	Code
A STN Contouring Die (Round)	HT. ADLRO
A STN Thick Turret Contouring Die (Round) $\phi 2.5+0.2$	HT. ADLRO. 2.5 /0.2
A STN Thick Turret Contouring Die (Round) $\phi 2+0.2$	HT. ADLRO. 2 /0.2
A STN Contouring Punch ass'y (Round)	HT. AALRO
A STN Thick Turret Contouring Punch ass'y (Round) $\phi 2$	HT. AALRO. 2
A STN Contouring Guide (Round)	HT. AGLRO
A STN Thick Turret Contouring Guide (Round) $\phi 2$	HT. AGLRO. 2
A STN Contouring Punch Insert (Round)	HT. APLRO
A STN Thick Turret Contouring Punch Insert (Round) $\phi 2$	HT. APLRO. 2
A STN Thick Turret Contouring Punch Insert (Round) $\phi 2.5$	HT. APLRO. 2.5



SPS Fully Guide Small Diameter





A STATION
(1.0–6.0mm)
[0.23"]

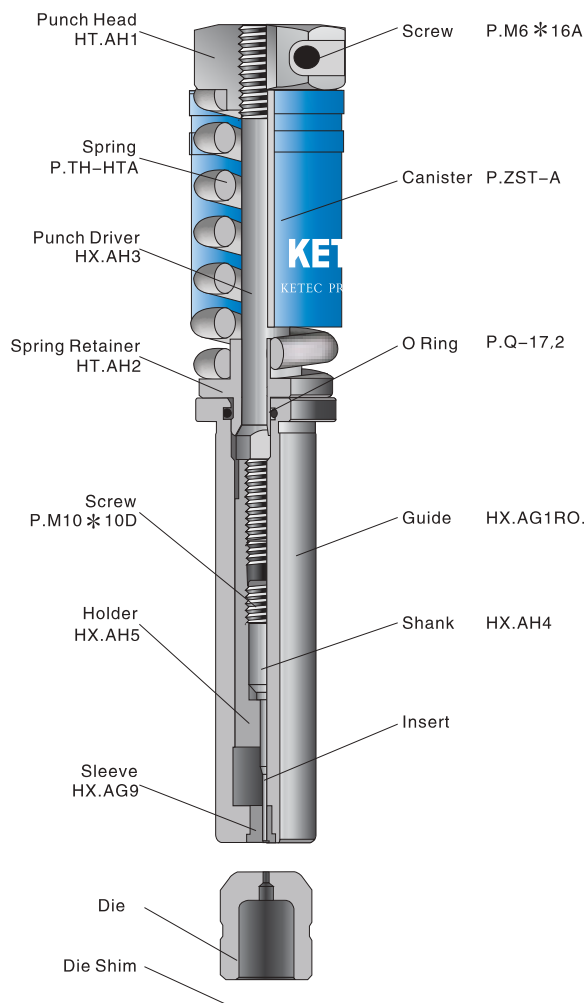

Description	Code
Punch ass'y	HX.AA1RO.
Insert	HX.AP1RO.
Guide	HX.AG1RO.
Die	HT.AD1RO.

- Recommended when punching small holes
- Replaceable insert, lower cost, only for round
- Small range: 1.0– 6 mm [0.04"~0.24"]
- Size should be over below data:

Aluminum 0.75T
Mild steel 1T
Stainless steel 2T

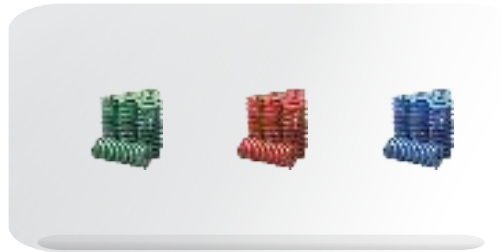




Heavy Duty (SPH80) A STATION (~12.7mm) [1/2"]




Description	Code
Punch ass'y	
Round (0°)	HH.AA1RO.
Square (0°, 135°)	HH.AA3SQ.
STD shape (0°, 90°)	HH.AA2**.
Other (0°, 90°)	HH.AA2**.
Punch	
Round (no pin)	HH.AP1RO.
STD shape (pin)	HH.AP2**.
Other (pin)	HH.AP2**.
Stripper	
Round	H9.AS1RO.
STD shape	H9.AS1**.
Other	H9.AS1**.
Die	
Round (no pin)	HZ.AD1RO.
STD shape (pin)	HZ.AD2**.
Other (pin)	HZ.AD2**.
Guide	
Round (0°)	H9.AG1
Shape (0°, 90°)	H9.AG2
Square (0°, 135°)	H9.AG3

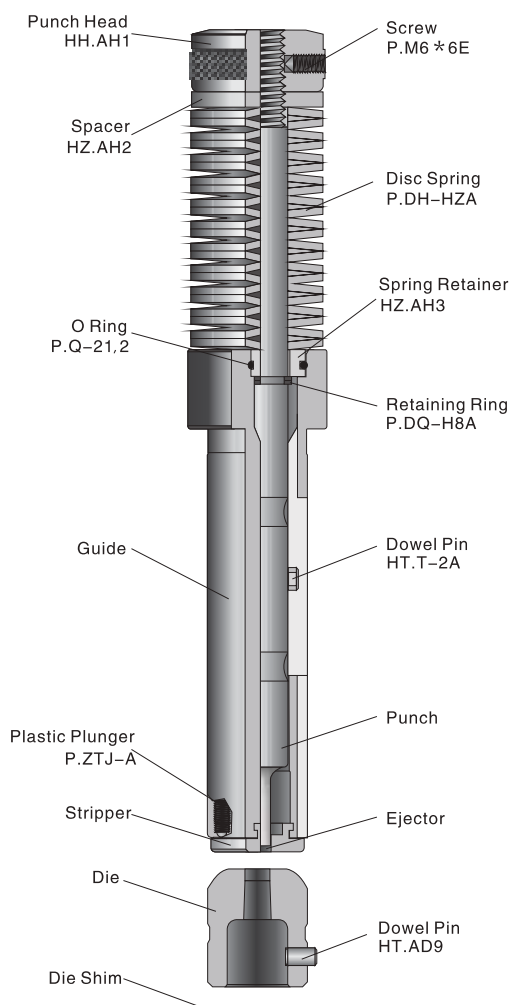














Heavy Duty (SPH80) B STATION (12.71–31.7mm) [1-1/4"]

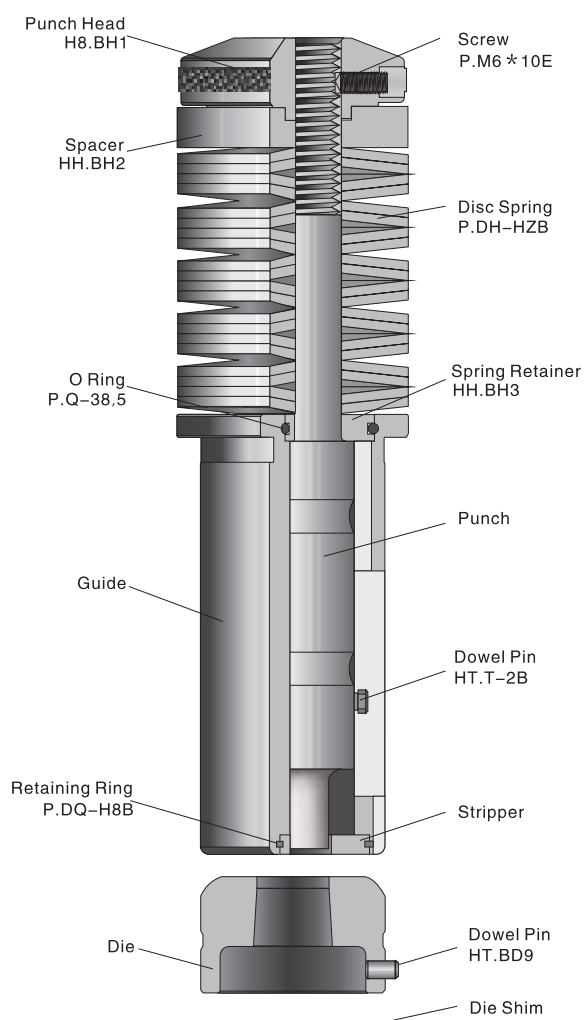

Description	Code
Punch ass'y	
Round (0°)	HH.BA1RO.
Square (0°, 135°)	HH.BA3SQ.
STD shape (0°, 90°)	HH.BA2**.
Other (0°, 90°)	HH.BA2**.
Punch	
Round (no pin)	HH.BP1RO.
STD shape (pin)	HH.BP2**.
Other (pin)	HH.BP2**.
Stripper	
Round	H8.BS1RO.
STD shape	H8.BS1**.
Other	H8.BS1**.
Die	
Round (no pin)	HZ.BD1RO.
STD shape (pin)	HZ.BD2**.
Other (pin)	HZ.BD2**.
Guide	
Round (0°)	H8.BG1
Shape (0°, 90°)	H8.BG2
Square (0°, 135°)	H8.BG3

MULTI-TOOL

	MTHUA	MTHUB	MTHGB	XMT12.7mm	XMT24mm
Punch Round Shape Square	HU.AP1RO. HU.AP1**. HU.AP1.	HU.BP1RO. HU.BP1**. HU.BP1.	HG.BP1RO. HG.BP2**. HG.BP2.	HE.10P1. HE. 10P2**. HE. 10P2**.	HE.6P1. HE.6P2**.
					
Stripper					
Round Shape Square	HU.AS1RO. HU.AS1**. HU.AS1.	HU.BS1RO. HU.BS1**. HU.BS1.	H9.BS1RO. H9.BS2**. H9.BS3.	HE.10S1. HE.10S1**. HE.10S1.	HE.6S1. HE.6S1**. HE.6S1.
Die					
Round Shape Square	HT.AD1RO. HT.AD2**. HT.AD2.	HT.BD1RO. HT.BD2**. HT.BD2.	HW.3D1RO. HW.3D2**. HW.3D2.	HE.10D1. HE.10D2**. HE.10D2.	HF.8D1. HF.8D2**. HF.8D3.
	MTHUA	MTHUB	MTHGB	XMT12.7mm	XMT24mm
Max. Size of Punch	12.7mm	31.7mm	31.7mm	12.7.0mm	24.0mm
Max. Size of Die	12.7mm+1.5mm	12.7mm+1.5mm	12.7mm+1.5mm	12.7mm+1.5mm	24.0mm+1.5mm
Height of Punch	108mm	100.5mm	100.5mm	100.0mm	100.0mm
Height of Die	30.0mm	30.0mm	15.0mm	17.5mm	24.0mm
Suitable for	Ultra MT8 Ultra IMT8	Ultra MT3 Ultra IMT3 MTE4-31.75mm	MT3Ri	XMTE10	XMTE6,XMTE10


DMT24mm	MT24-8mm	MT10-16mm	MT8-24mm	MT8i1-16mm	MT8i2-16mm
Q.H.0013.RO Q.H.0013.**	HF.24P1. HF. 24P1**	HF.10P1. HF. 10P1**	HF.8P1. HF. 8P1**	HW.8P1.RO HW.8P2** HW.8P3SQ	HW.8P1.RO HW.8P2**. HW.8P3SQ
					
					
Q.H.0014.RO. Q.H.0015.**. Q.H.0015.SQ.	HF.24S1. HF.24S2**. HF.24S2.	HF.10S1. HF.10S2**. HF.10S3.	HF.8S1. HF.8S2**. HF.8S3.	HW.8S1. HW.8S1**. HW.8S1.	HW.8S1. HW.8S1**. HW.8S1.
					
HF.8D1. HF.8D2**. HF.8D3.	HF.24D1. HF.24D2**. HF.24D2.	HF.10D1. HF.10D2**. HF.10D3.	HF.8D1. HF.8D2**. HF.8D3.	HW.8D1. HW.8D2**. HW.8D2.	HW.8D1. HW.8D2**. HW.8D2.
DMT24mm	MT24-8mm	MT10-16mm	MT8-24mm	MT8i1-16mm	MT8i2-16mm
24.0mm	8.0mm	16.0mm	24.0mm	16.0mm	16.0mm
24.0mm+1.5mm	8.0mm+1.5mm	16.0mm+1.5mm	24.0mm+1.5mm	16.0mm+1.5mm	16.0mm+1.5mm
113.5mm	70.5mm	70.5mm	70.5mm	100.0mm	100.6mm
24.0mm	17.0mm	24.0mm	24.0mm	17.6mm	17.6mm
only for DURMA	MT20,MT24, MT12,MT20,	MT6,MT10	MT6,MT8 MTE6,MTE10	MT8Ri	MT8Ri

E-Break Tool


E-Bend Tool



E-Break tool

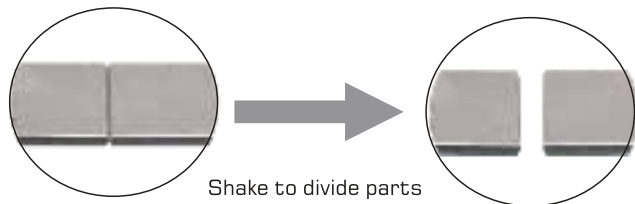

E-Bend tool

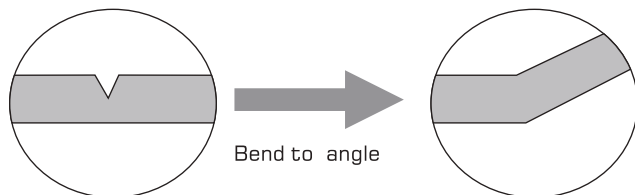

The code of E-Break tool

	Punch ass'y	Die ass'y
B STN	H.TBX.DZ**	H.TBS.DZ**
C STN	H.TCX.DZ**	H.TCS.DZ**

The code of E-Bend Tool

	Set ass'y	Set ass'y
B STN	H.TBS.DZ**	H.TBX.DZ**
C STN	H.TCS.DZ**	H.TCX.DZ**

- Be available at B, C, D station.
- Punch ass'y designed for specified thickness and material. Not adjust.
- V-line tip on punch and die insert create weak slot in sheet metal. Shake up and down to break parts. In E-bend, only one V-line tip.
- Restriction for thickness: Minimum 0.8mm[0.03"], Maximum 1.5mm[0.06"]
- E-Break tool, clear, smooth in cutting edge after breaking.
- E-Bend tool, the angle is not recommended to be over 90 degree.

SLITTING TOOL



Wilson

Description	C STN	D STN	E STN	WIDTH
Blade	HI.CW1RE	HI.DW1RE	HI.EW1RE	19.05mm [0.77"]
Holder	HI.CW9			19.05mm


Amada

Blade		HI.DT1RE	HI.ET1RE	16mm [0.63"]
Holder		HI.DT9	HI.ET9	16mm
ABS Holder		HI.DT8	HI.ET8	16mm

Mate

Blade		HI.DM1RE	HI.EM1RE	18mm [0.71"]
Holder		HI.DM9		18mm

CLUSTER

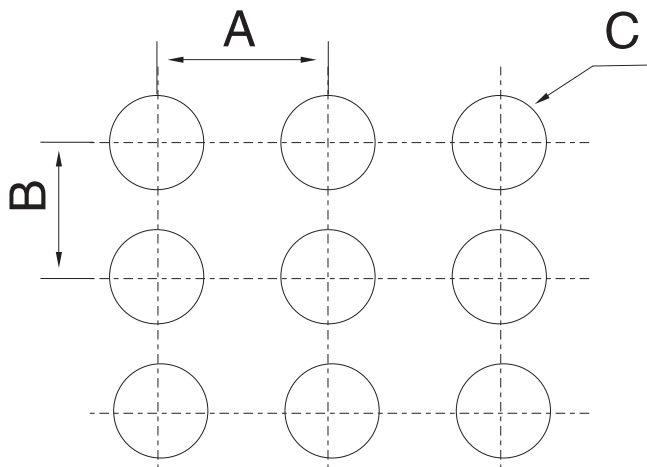

Machine _____

Material _____

A _____

B _____

C _____

T _____

■ Space of holes must be over 3.2mm [0.13"] or 2T

■ Please fill in the above form







■ FORMING TOOLS

KETEC have extensive experience in the design and manufacture of the forming tools, we also have TRUMPF machine, thick turret CNC machine etc., for testing the tooling. We surely can provide the ideal tooling products to you.

Please consult KETEC engineers for questions when customizing the forming tools to your design.

Q-ADJUST FORMING TOOL A/B STATION

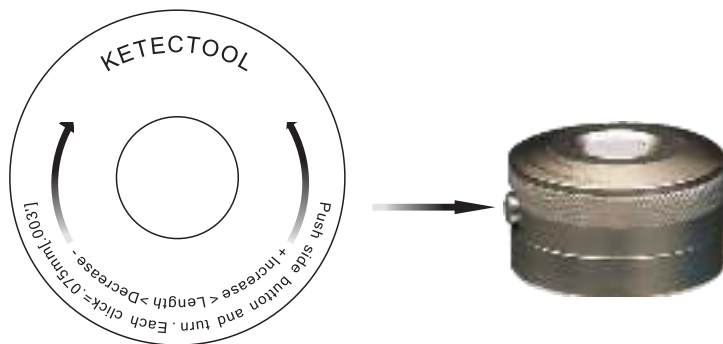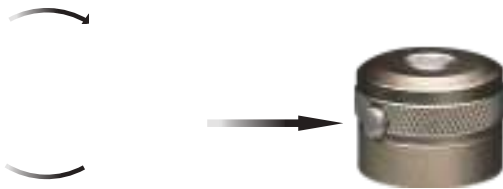

Q-ADJUST FORMING TOOL C/D STATION



WHEEL RIB

High speed, equal to table travel speed

Make any shape in auto index station

No nibble marks

Replaceable wheels

Works under related program

Thickness:

Stainless steel 0.8–1.5mm [0.03"~0.06"]

Mild steel 0.8–2mm [0.03"~0.08"]

Aluminum 0.8–2.5mm [0.03"~0.10"]

Height: 2~3T, Width: 4~6T(2*H), Max Width: 12.7mm [0.50"]



WHEEL OFFSET



CHARACTER STAMPING


Character font & range:

A B C D E F G H I J K L M

N O P Q R S T U V W X Y Z

0 1 2 3 4 5 6 7 8 9

& / . - ()

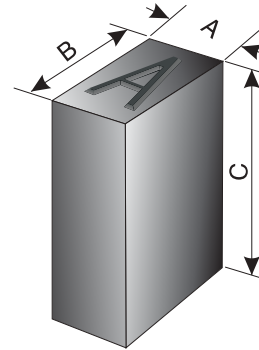


Character type & size:

TYPE	SIZE A	SIZE B	SIZE C
2.4	2.36mm [0.09"]	6.35mm [0.25"]	19.05mm [0.75"]
3.2	3.175mm [0.13"]	6.35mm [0.25"]	19.05mm [0.75"]
4.8	4.76mm [0.19"]	7.94mm [0.31"]	19.05mm [0.75"]
6.4	6.35mm [0.25"]	9.52mm [0.37"]	19.05mm [0.75"]

Note: 2.4 type is too small, not recommended.

Character height chart (1:1)

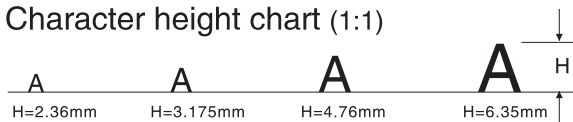


Character depth & force KN (AL, MS, SS)

TYPE	DEPTH	AL	MS	SS
2.4	0.1mm	1.1KN	2.8KN	8.9KN
3.2	0.1mm	1.6KN	4.4KN	13.3KN
4.8	0.2mm	3.6KN	10.7KN	30.2KN
6.4	0.3mm	6.2KN	16.9KN	48.9KN

Note: 2.4 type is too small, not recommended.



EMBOSS-EXPANDED METAL


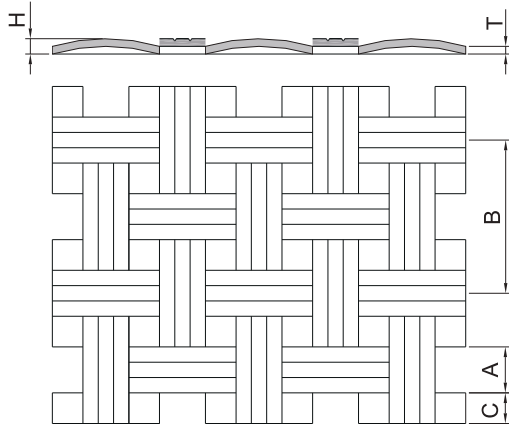


Machine _____ A _____
 Material _____ B _____ H _____
 C _____ T _____



- Forbid punching without sheet
- Need prepunch
- Max. thickness: mild steel 1.5mm [0.06"]
- Fill in the above form


EMBOSS-DRIPS

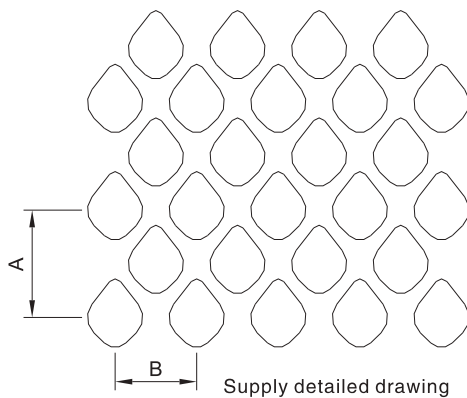

Machine _____ A _____ H _____
 Material _____ B _____ T _____

- Forbid punching without sheet
- Max. thickness: 1.5mm [0.06"]
- Fill in the above form

CENTERPOINT

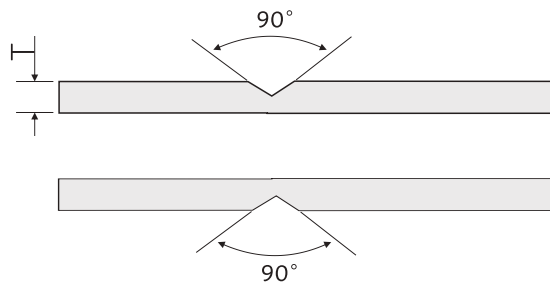

Form Down


Form Up



Machine _____
Material _____ T _____

- Forbid punching without sheet
- Adjust punch ass'y height to control the depth of centerpoint
- Form Up, Form Down
- Angle: 90°, Max. thickness: 6.0mm [0.24"]

HALF SHEAR

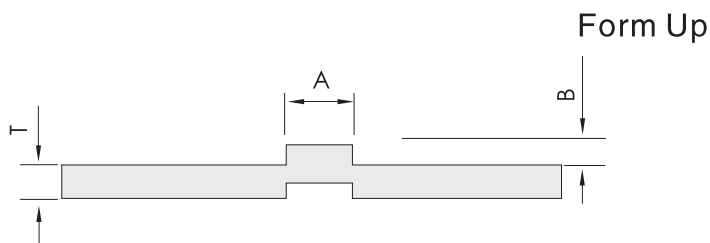


Form Up

Machine _____
Material _____ A _____ B _____ T _____

- Give tool enough time to strip
- Form Up, Form Down
- Max. B size: 0.6T



EXTRUSION TAPPING

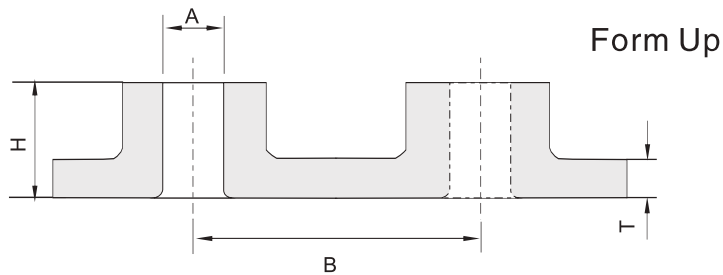

Machine _____ A _____
 Material _____ B _____ T _____
 H _____

- Need prepunch
- Give tool enough time to strip
- Replaceable insert design on extrusion
- Form Up, Form Down
- Max. thickness: Mild steel 2.3mm [0.09"], AL 2.0mm [0.08"], 1.2mm [0.05"]
- Forming height (Max. H): over 3*thread pitch

Prepunch size (Stainless steel) Unit: mm [inch]


Extrusion		Thickness: T			
Size	ØA	0.6 [0.02"]	0.8 [0.03"]	1.0 [0.04"]	1.2 [0.05"]
M2.6	2.21 [0.09"]	1.3 [0.05"]	1.3	1.3	
M3	2.60 [0.10"]	1.3	1.3	1.6 [0.06"]	1.8 [0.07"]
M4	3.40 [0.13"]		2.0 [0.08"]	2.0	2.0
M5	4.30 [0.17"]			2.3 [0.09"]	2.3
M6	5.10 [0.20"]			3.0 [0.12"]	3.0

Prepunch Size (MS, AL) Unit: mm [inch]

Extrusion		Thickness: T					
Size	ØA	0.8 [0.03"]	1.0 [0.04"]	1.2 [0.05"]	1.6 [0.06"]	2.0 [0.08"]	2.3 (no AL) [0.09"]
M2.6	2.21 [0.09"]	1.3 [0.05"]	1.3	1.3	1.6 [0.06"]		
M3	2.60 [0.10"]	1.3	1.3	1.6	1.6		
M4	3.40 [0.13"]	2.0 [0.08"]	2.0	2.0	2.3	2.3	2.5 [0.10"]
M5	4.30 [0.17"]		2.3 [0.09"]	2.3	2.8 [0.11"]	2.8	3.0
M6	5.10 [0.20"]			3.0 [0.12"]	3.0	3.8 [0.15"]	3.8



EXTRUSION

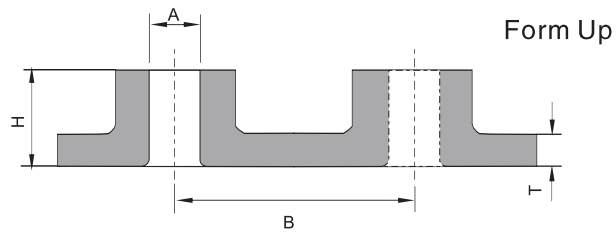


Machine _____
Material _____

A _____
B _____
H _____
T _____

- Need prepunch
- Give tool enough time to strip
- Form Up, Form Down
- Max. height: $H \geq 2T$



EMBOSS & EXTRUSION

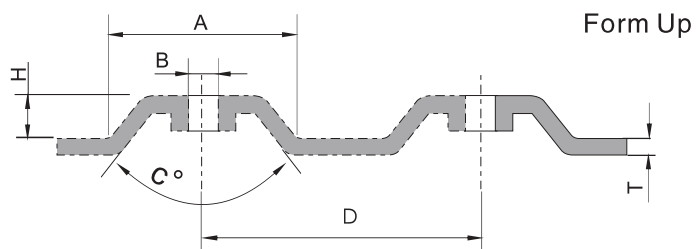


Machine _____
Material _____

A _____
B _____
C _____
D _____
H _____
T _____

- Complete emboss and extrusion on one hit
- Give tool enough time to strip
- Form Up only



EMBOSS

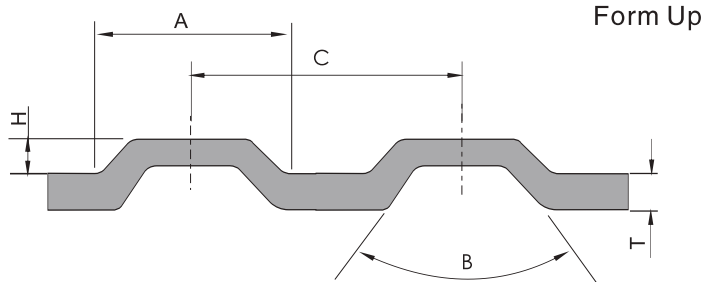


Machine _____ A _____ H _____
 Material _____ B _____ T _____
 C _____

- Escape clamp or punching hole
- Can form in Round or Shape
- Give tool enough time to strip
- Form Up, Form Down



BRIDGE


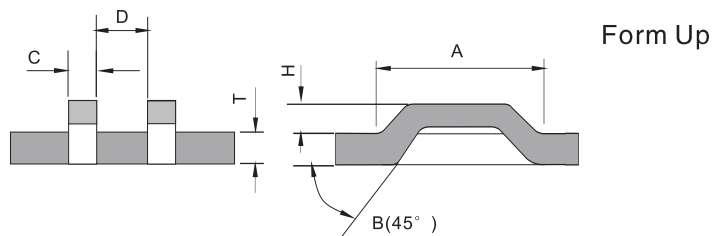


Machine _____ A _____ D _____
 Material _____ B _____ H _____
 C _____ T _____



- Can be designed in single or double bridge
- Give tool enough time to strip
- Form Up, Form Down
- Width of the Bridge: $C \geq 2T$ and $C \geq 1.8\text{mm}$ [0.07"]



LANCE & FORM




Machine _____ A: _____ D: _____
 Material _____ B: _____ R: _____
 C: _____ H: _____ T: _____

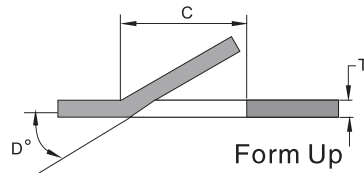


Machine _____ A _____
 Material _____ B _____ D _____
 C _____ R _____ T _____

- Tooling is made for specific thickness
- Give tool enough time to strip
- Form up only

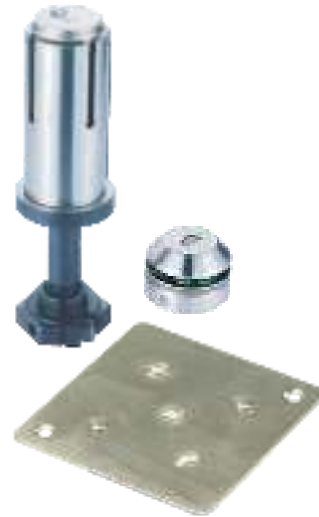


LOCATOR

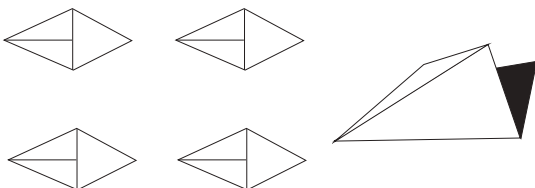

- No scab on opposite side of sheet metal
- Use thinner thickness if shear button cannot work
- Forbid punching without sheet
- Min. spaces between centers of locators: 15mm



CLOSE LOUVER

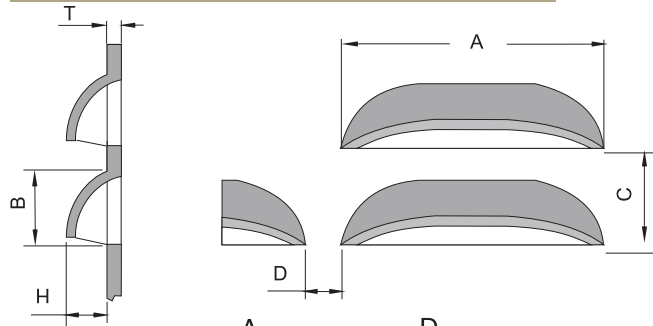


Machine _____ A _____ D _____
 Material _____ B _____ H _____
 C _____ T _____

- Tooling is made for specific thickness
- Consider the travel direction of the sheet metal, give tool enough time to strip
- Adjust length without shim, replaceable insert
- Form Up only

STOCKED SIZE				
SIZE A	50 [1.97]	80 [3.15]	80 [3.15]	80 [3.15]
SIZE B	10 [0.39]	10 [0.39]	12 [0.47]	15 [0.59]
SIZE H	5 [0.20]	6 [0.24]	6 [0.24]	6 [0.24]



OPEN LOUVER

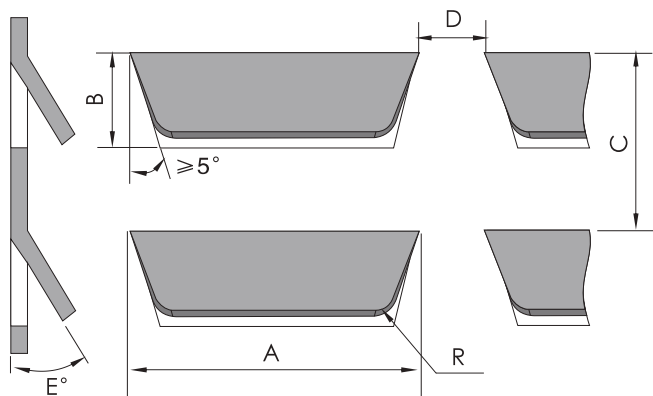


Machine _____ A _____ D _____
 Material _____ B _____ E _____
 C _____ T _____ R _____

- Tooling is made for specific thickness
- Consider the travel direction of the sheet metal, give tool enough time to strip
- Adjust length without shim, replaceable insert
- Form Up only



CARD GUIDE

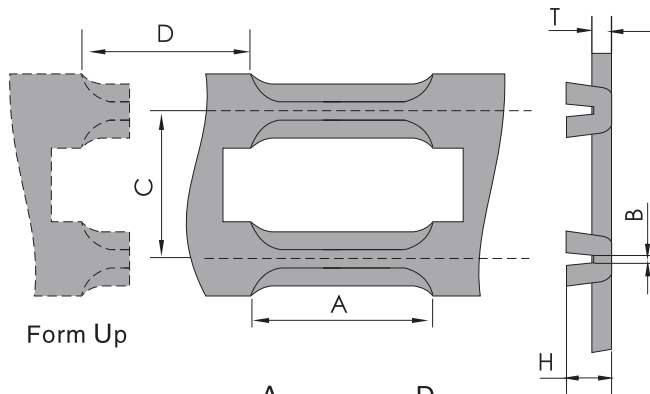


Form Up

Machine _____ A _____ D _____
 Material _____ B _____ H _____
 C _____ T _____

- Tooling is made for specific thickness
- Give tool enough time to strip
- Adjust length without shim, replaceable insert
- Form up Height: $H \leq 2T$, otherwise will be deformation easily
- Form Up



HINGE

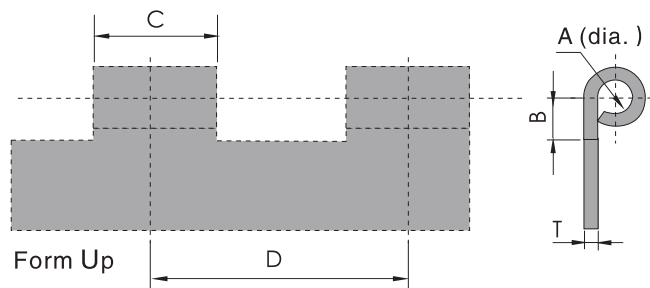


Form Up

Machine _____ A _____ D _____
 Material _____ B _____ T _____
 C _____

- Tooling is made for specific thickness, need prepunch
- First for curling, second for forming
- Thickness: $T \leq 1.5\text{mm}$ (Mild Steel); $T \leq 1.5\text{mm}$ (Stainless Steel)
- Form Up only



RIB TOOL

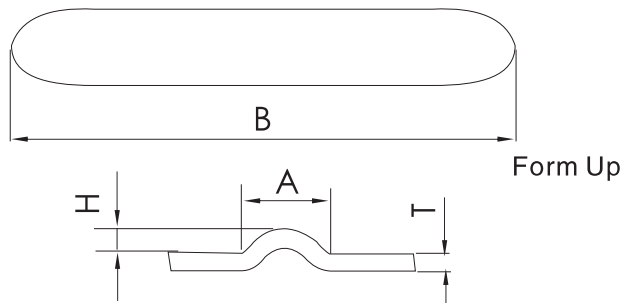


Machine _____ A _____ H _____
Material _____ B _____ T _____



- Keep proper away from holes, clamp, material edge
- Form Up, Form Down
- Increment of ribbling rib should be 0.5~2.0mm [0.02"~0.08"]
- Max. thickness 2.7mm (MS & AL), 2.3mm(SS)

KNOCKOUT

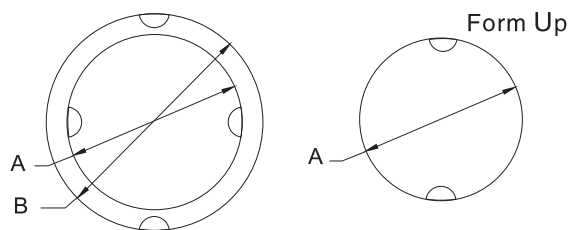


Machine _____ A _____ T _____
Material _____ B _____



- Forbid punching without sheet
- Adjust the height of the tool to change the depth when punching
- Can be designed in single / double / triple EKO
- The positioning must be accurated for the bottom dead point of the CNC punch press machine
- Form Up, Form Down

THREAD FORM

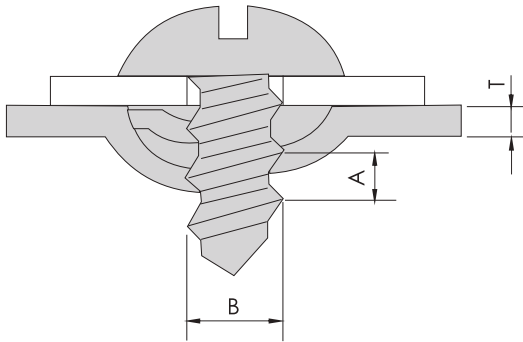


Machine _____ A _____
Material _____ B _____ T _____

■ Form Up, Form Down

■ Thickness range: 0.5mm~1.2mm [0.02"~0.05"]



THREAD LOOP

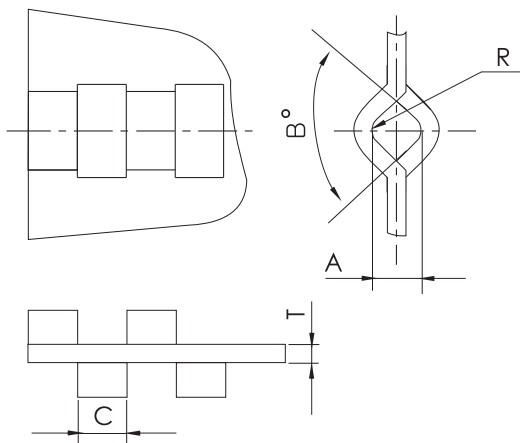


Machine _____ A _____ C _____ R _____
Material _____ B _____ T _____

■ Standard angle for B is 90°
■ Please fill in the left form



STAMPING

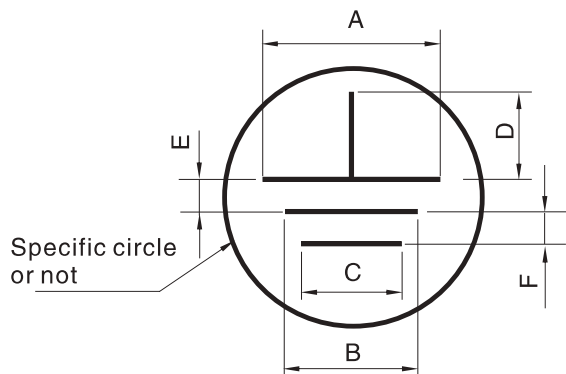

Machine _____ A _____ D _____ G_(width) _____
 Material _____ B _____ E _____ H_(depth) _____
 C _____ F _____

- Forbid punching without sheet
- Adjust the height of the tool to change the depth when punching
- Turn in any direction in auto index station
- Form Up, Form Down


MULTI-SCRIBE



- Forbid punching without sheet
- Required special control program for the machine
- Change spring for different sheet metal in auto index station
- Form Down only




COUNTERSINK

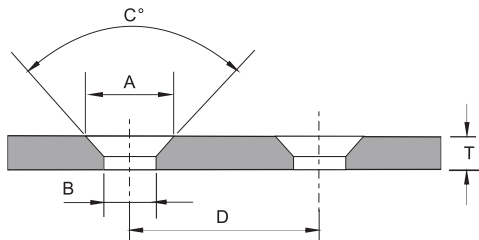

Machine _____
Material _____

A _____
B _____
C _____
D _____
T _____

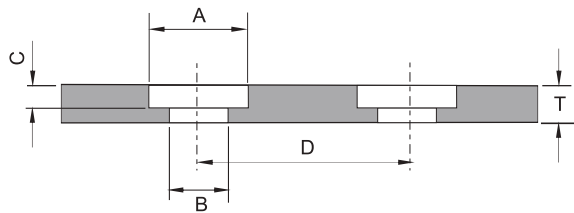


Machine _____
Material _____

A _____
B _____
C _____
D _____
T _____

- Need prepunch
- Adjust prepunch size to get different depth
- Form Up, Form Down
- Max. thickness: $T \geq 1.0\text{mm}$ [0.04"]

EMBOSS COUNTERSINK

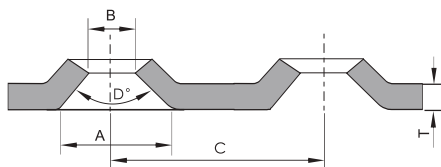

Machine _____
Material _____

A _____
B _____
C _____
D _____
T _____

- Suggest using prepunch
- Form up only



Thick Turret Tools Cabinet



Thick Turret Tools Trolley



Demagnetizer



Visual Measurement System
for Sheet Metal



Auto Tool Grinding Machine



SHEET METAL ACCESSORIES

- Visual Measurement System for Sheet Metal
- Thick Turret Tools Cabinet
- Thick Turret Tools Trolley
- Alignment Tool
- Adaptor
- Demagnetizer
- Mounting or Dismounting Holder
- Accessories
- Auto Tool Grinding Machine

VISUAL MEASUREMENT SYSTEM FOR SHEET METAL



Suitable for measuring the flat sheet metal of CNC punching machine, laser cutting machine, plasma cutting machine, general punching machine.

- Measurement accuracy: central area $\pm 0.05\text{mm}$ [0.002"]
- Single max. measurement range: 1500mm $\times$ 1000mm [59.05" $\times$ 39.37"]
- Applicable range: flat sheet metal parts of different materials
- Size: 2090mm(L) $\times$ 1880mm(W) $\times$ 3700mm(H) [82.28"(L) $\times$ 74.01"(W) $\times$ 145.67"(H)]
- Weight: approx. 800Kg
- Power supply: single-phase AC 220V
- Power: < 1.5KW

Thick Turret Tools Trolley

Code: J.MJC-HT

Standard configuration

6 Shelves (3A+3B), 12 Shelf supports

Full load 27 sets A station,

18 sets B station,

several C/D/E station



Shelf for A station J.MJC-HTMJ1

Capacity: Each shelf 9 sets Punch ass'y



Shelf for B station J.MJC-HTMJ2

Capacity: Each shelf 6 sets Punch ass'y



Trolley
J.MJC-CJ

Shelf supports
J.MJC-ZJ

Thick Turret Tools Cabinet

Code: J.MJG-HT

Standard configuration

Accommodates 4 Layers (Standard: 2A+2B)

A STN Punch ass'y 36 sets, Punch 36 pcs, Die 110 pcs

B STN Punch ass'y 24 sets, Punch 24 pcs, Die 80 pcs

Features C/D/E STN Punch ass'y 12 sets, several Punches, Dies, Strippers

Layer for A STN J.MJG-HTCB1

Capacity:

Each layer loads 18 punch ass'y, 18 punches and 54 dies



Thick Turret Tools Cabinet
J.MJG-HTGT

Layer for B STN J.MJG-HTCB2

Capacity:

Each layer loads 12 punch ass'y, 12 punches and 36 dies



ALIGNMENT TOOL



A STN



B STN



C STN



D STN

DESCRIPTION	Code	Code	Code	Code
Set assy	J.DW-HA1	J.DW-HB1	J.DW-HC1	J.DW-HD1
Punch assy	J.DW-HA2	J.DW-HB2	J.DW-HC2	J.DW-HD2
Die	J.DW-HA3	J.DW-HB3	J.DW-HC3	J.DW-HD3
T-Handle	J.DW-HA4	J.DW-HB4	J.DW-HB4	J.DW-HB4

ADAPTER



STN	Description	Code	Price
B-A	Punch ass'y	J.H-BA1	
	Die ass'y	J.H-BA3	
C-A	Punch ass'y	J.H-CA1	
	Die ass'y	J.H-CA3	
D-A	Punch ass'y	J.H-DA1	
	Die ass'y	J.H-DA3	
C-B	Punch ass'y	J.H-CB1	
	Die ass'y	J.H-CB3	
D-B	Punch ass'y	J.H-DB1	
	Die ass'y	J.H-DB3	
D-C	Punch ass'y Die ass'y	J.H-DC1	

DEMAGNITIZER

CODE	PRICE
J.DZ-1	



Technical data:

1. Rated voltage: 220V $\pm$ 10% 50HZ
2. Rated current: 3.3A single phase
3. Electrical energy: 1KW, Weight 6.0 KG
4. Size(mm): 300x158x230 [11.81"x6.22"x9.05"]

MOUNTING & DISMOUNTING HOLDER



Description	Code	Price
Holder for set	J.ZPT	
Holder for A/B punch	J.ZPT-HAB	
Holder for A/B forming	J.ZPT-HABS	
Holder for C/D/E	J.ZPT-HCDE	

BALL RIDING DIE BRUSH DIE

Description	Ball Riding Die	
STN	CODE	PRICE
A station	J.GZ-HA1	
B station	J.GZ-HB1	
C station	J.GZ-HC1	
D station	J.GZ-HD1	



Description	Brush Die	
STN	CODE	PRICE
A station	J.MS-HA1	
B station	J.MS-HB1	
C station	J.MS-HC1	
D station	J.MS-HD1	

ACCESSORIES

Inner Plier		Outer Plier	
Code	Price	Code	Price
J.NKQ		J.WKQ	



Hex Wrench	
Code	Price
J.BS	



EJECTOR

Description	φ 3mm		φ 6mm		φ 10mm	
	Code	Price	Code	Price	Code	Price
Ejector	P.JL03		P.JL06		P.JL10	
Package	P.JL0315		P.JL0610		P.JL1005	



SHIM



Description	A STN	B STN	C STN	D STN
	Code	Code	Code	Code
Punch Shim 0.4mm 0.016"			P.DP-HCP04	P.DP-HDP04
Punch Shim 0.8mm 0.031"			P.DP-HCP08	P.DP-HDP08
Punch Shim 1.2mm 0.047"			P.DP-HCP12	P.DP-HDP12
Punch Shim pack (9 pcs)			P.DP-HCP	P.DP-HDP
Die Shim 0.4mm 0.016"	P.DP-HAD04	P.DP-HBD04	P.DP-HCD04	P.DP-HDD04
Die Shim 0.8mm 0.031"	P.DP-HAD08	P.DP-HBD08	P.DP-HCD08	P.DP-HDD08
Die Shim 1.2mm 0.047"	P.DP-HAD12	P.DP-HBD12	P.DP-HCD12	P.DP-HDD12
Die Shim pack (9 pcs)	P.DP-HAD	P.DP-HBD	P.DP-HCD	P.DP-HDD

Note: one pack include 3 pcs for different thickness

Auto Tool Grinding Machine

Model: AG-135




- Automatic sharpening CNC punch press tools.
- Tool grinding system programs autonomously.
- Precision grinding: $\pm 0.005\text{mm}$.


Basic Parameters

Overall size	L x W x H	Unit: mm	900 x 800 x 1920
Weight		Unit: kg	1100
Voltage	380V AC	Unit: V	3-phase / 5-line
Max. power		Unit: KW	1.75

A STATION

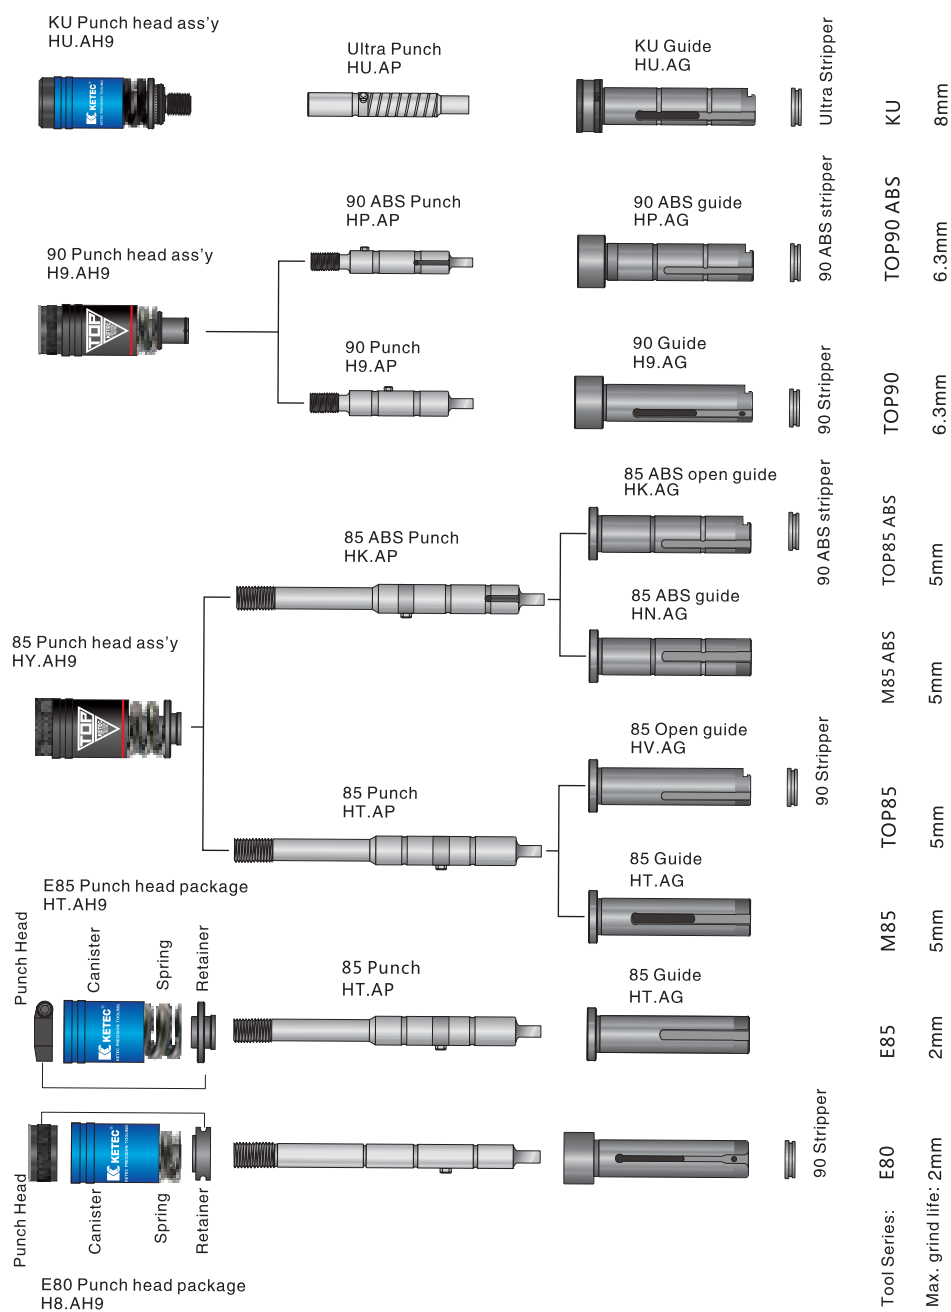


B STATION

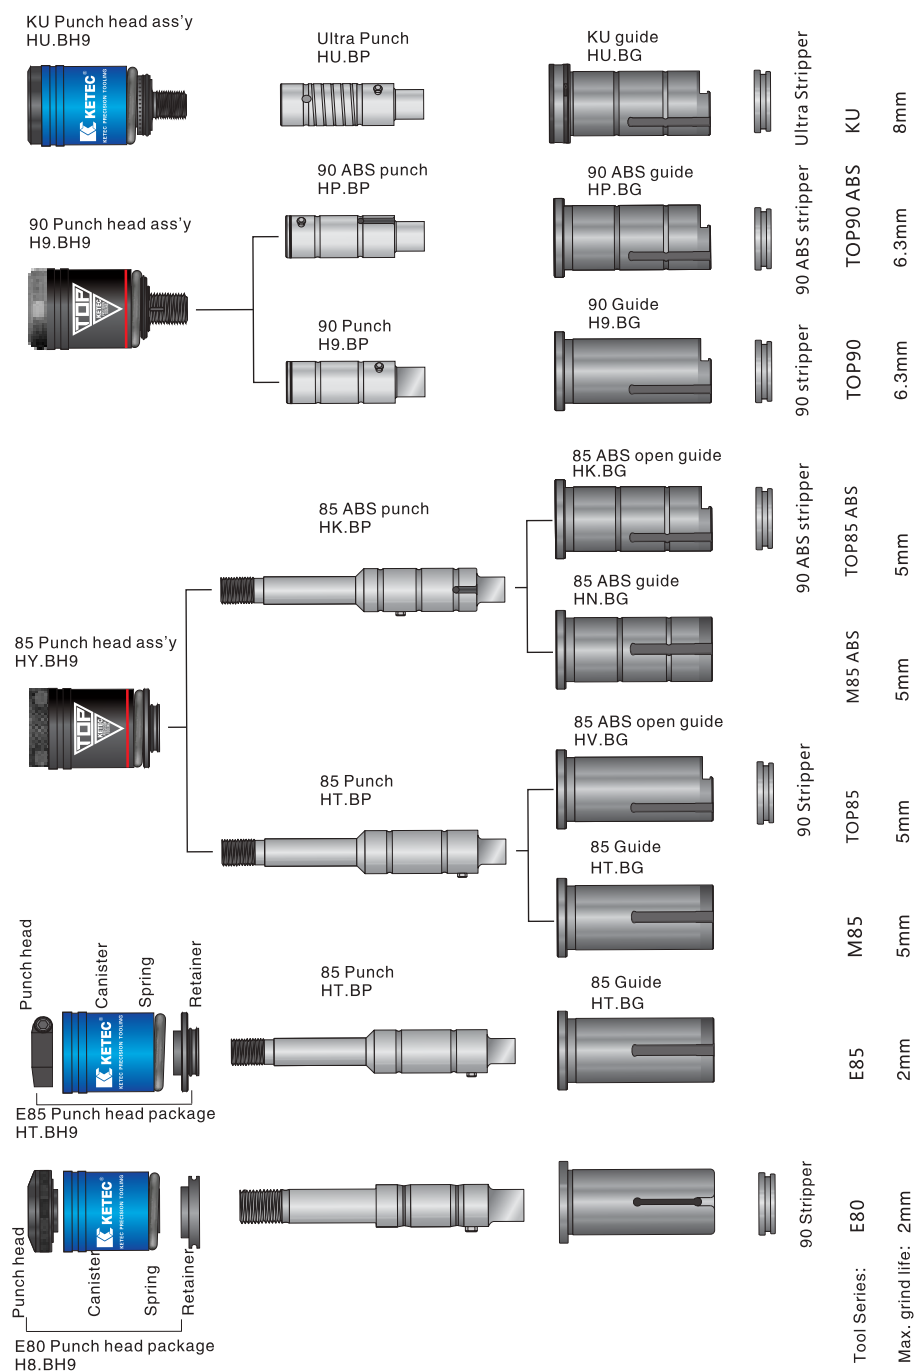


C STATION

E85
Guide ass'y
HT.CC1



85 Punch
HT.CP




85 Stripper
HT.CS




Tool series: E85
Max. gring life: 2mm

TOP 85
Guide ass'y
HV.CC1



85 Punch
HT.CP




85 Stripper
HT.CS




TOP85
5~8mm

TOP85ABS
Guide ass'y
HK.CC1



85 ABS Punch
HK.CP




85 ABS stripper
HK.CS




TOP85 ABS
5~8mm

TOP90ABS
Guide ass'y
HP.CC1



90 Punch
H9.CP



90 Stripper
H9.CS










90 ABS stripper
HP.CS



TOP90
5~8mm

TOP90 ABS
5~8mm

D STATION

E85 Guide ass'y HT.DC1	TOP 85 Guide ass'y HV.DC1	TOP85ABS Guide ass'y HK.DC1	TOP90ABS Guide ass'y HP.DC1
			
85 Punch HT.DP	85 Punch HT.DP	85 Punch HK.DP	90 Punch H9.DP
			
85 Stripper HT.DS	85 Stripper HT.DS	85 ABS stripper HK.DS	90 Stripper H9.DS
			
85 ABS stripper HP.DS			
			
E85	TOP85	TOP85 ABS	TOP90 ABS
Tool series:	E85		
Max. grind life:	2mm	5~8mm	5~8mm

SHAPE CLASSES



STANDARD SHAPE					
	Code: RE Name: Rectangle Size: B/A	Code: OB Name: Oblong Size: B/A	Code: SQ Name: Square Size: A	Code: SD Name: Single D Size: B/A	Code: DD Name: Double D Size: B/A
	Code: QD Name: Quad D Size: B/A	Code: QR Name: Quad R Size: B/A/R	Code: ET Name: Equilateral Triangle Size: A	Code: HX Name: Hexagon Size: A	Code: OT Name: Octagon Size: A

GROUP A					
	Code: A0 Name: Diamond Size: B/A	Code: A1 Name: Diamond Size: B/A/R	Code: A2 Name: Diamond Size: B/A/C	Code: A3 Name: Diamond Size: B/A/C/R	Code: A4 Name: Cable Connector Size: B/A/C/R
GROUP B					
	Code: A5 Name: Six Edges Size: B/A/C	Code: A6 Name: Eight Edges Size: C/B/A/D	Code: A7 Name: Triangle Size: B/A	Code: A8 Name: Triangle w/R Size: A/B/R	Code: A9 Name: Right Triangle Size: B/A

Code: B0 Name: Double R Size: B/A/C/D/R	Code: B1 Name: Tri-R Size: B/A/C/D/E	Code: B2 Name: Quad-R Size: B/A/D/E/F/G	Code: B3 Name: Ellipse Size: B/A/C/R	Code: B4 Name: Football Size: A/B	Code: B5 Name: Key Hole Size: A/B/C


SPECIAL SHAPE

Special shape follows
the attached drawing


CODE: FT

SAME STATION TOOLING, SAME GROUP SHAPE, SAME PRICE!


GROUP C




Code: C0
Name: Key Way
Size: C/B/A




Code: C1
Name: Double Key Way
Size: C/B/A




Code: C2
Name: Quad Key Way
Size: C/B/A




Code: C3
Name: Key Way
Size: C/B/A




Code: C4
Name: Key Way
Size: C/B/A



Code: C5
Name: Key Way
Size: C/B/A




Code: C6
Name: Key Way
Size: C/B/A/D




Code: C7
Name: Micro-joint
Size: B/A


GROUP D




Code: D0
Name: Triangle w/R
Size: A/B/C/R




Code: D1
Name: One way radius
Size: B/A/R




Code: D2
Name: Four way radius
Size: A/R



Code: D3
Name: Four way radius
Size: A/B/C/D/E/F




Code: D4
Name: H w/radius
Size: D/C/B/A




Code: D5
Name: H shape
Size: D/C/B/A


GROUP E F




Code: E0
Name: Four radius
Size: A/B/C/D/E




Code: E1
Name: Banana
Size: A/C/D/R




Code: E2
Name: Banana
Size: B/C/A




Code: E3
Name: Connector
Size: D/B/C/A/R




Code: E4
Name: Connector
Size: D/B/A/C/F/R




Code: E5
Name: Connector
Size: D/B/C/A/R




Code: E6
Name: Key Hole
Size: C/A/B




Code: E7
Name: Key Hole
Size: C/A/B




Code: E8
Name: Key Hole
Size: C/A/B




Code: F0
Name: Key Hole
Size: C/A/B




Code: F1
Name: Key Hole
Size: C/A/B




Code: F2
Name: Key Hole
Size: C/A/B




Code: F3
Name: Key Hole
Size: B/C/A




Code: F4
Name: T shape
Size: D/C/B/A




Code: F5
Name: T shape
Size: D/C/A/B



Code: F6
Name: Cross
Size: C/B/D/A



Code: F7
Name: Cross
Size: B/A/D



Code: F8
Name: Cross
Size: B/A/C/D/R

Punch Die Stripper

RECIPIENT:	SENDER:
COMPANY:	END USER:
DEPT.:	TELEPHONE:
TELEPHONE:	FAX No.:
FAX No.:	PAGES:
SUBJECT:	DATE:

[illegible]



WeChat of KETEC PRECISION TOOLING

More about KETEC PRECISION TOOLING, please enter

[Http://www.ketecool.com](http://www.ketecool.com)



KETEC has certified by the ISO 9001:2008 quality management system

KETEC[®]

Ketec Precision Tooling Co.,Ltd.

Add: No.7,Lifeng Road., Mingzhu Industrial Park,Conghua, Guangzhou, China

P.O.Box: 510931

Tel: 0086 20 37965500 Fax: 0086 20 37965133

E-mail: international@ketecool.com

[Http://www.ketecool.com](http://www.ketecool.com)